

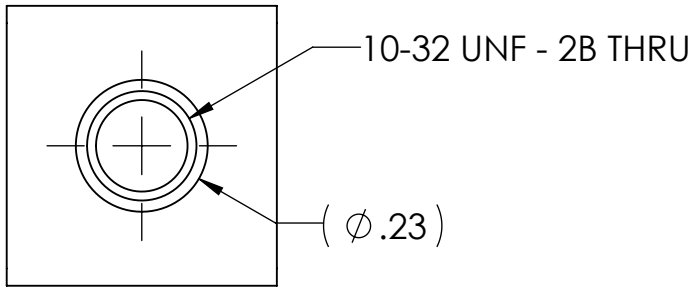
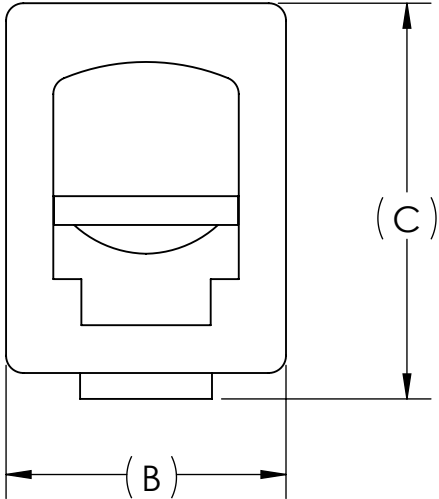


- METAL STAMP TO READ:
- 1. PENN-UNION
 - 2. "CATALOG NUMBER"
 - 3. "WIRE RANGE"
 - 4. AL7CU
 - 5. 

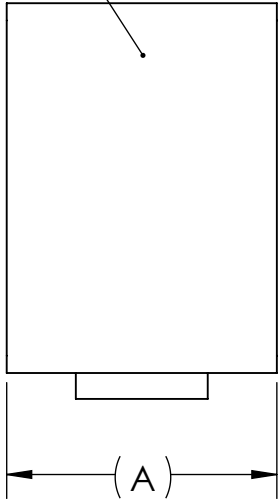

REV.	CATALOG NUMBER	WIRE RANGE	DIMENSIONS			HEX SIZE	INSTALLATION TORQUE (IN•LB)	APPROX. WEIGHT (LBS)
			A	B	C			
-	ABL-2S	14 STR. - 2 STR.	.47	.49	.69	3/16	40 IN•LB	0.010
-	ABL-1/0S	14 STR. - 1/0 STR.	.63	.56	.74	7/32	20 IN•LB	0.018

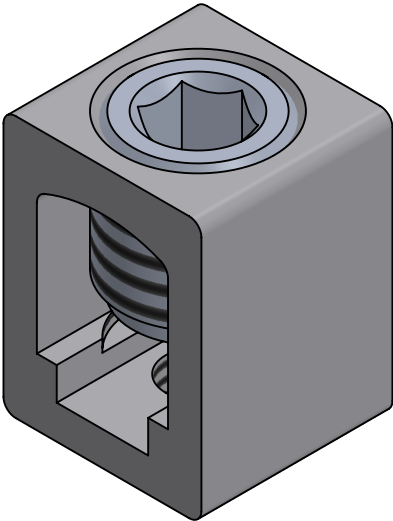

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - MANUFACTURED FROM HIGH STRENGTH ALUMINUM ALLOY EXTRUSION
 - ELECTRO-TIN PLATED TO ENSURE MINIMUM CONTACT RESISTANCE AND CORROSION PROTECTION
 - CONNECTORS ARE CURUS RECOGNIZED COMPONENTS AND AL7CU RATED FOR 600V, 75°C APPLICATIONS
 - THE USE OF OXIDE INHIBITOR IS RECOMMENDED FOR ALL ALUMINUM TERMINATIONS
 - DESIGNS INCLUDE BOSSED MOUNTING HOLES WHICH ACT AS AN ANTI-ROTATION DEVICE THAT PREVENTS THE CONNECTOR FROM TURNING
 - ABL2R IN VIEWS IS REPRESENTATIVE, EXACT COMPONENT FEATURES MAY VARY



			1	SET SCREW
			1	BODY
QTY.			PT.	NAME OR DESCRIPTION
				ALUMINUM DUAL RATED BOX LUGS for 14 STR. - 1/0 STR. ALUMINUM AND COPPER CONDUCTORS
REF. DWG'S: 5J29-96393, 5J29-96391			H:\5J29\ABL-2R, ABL-1/0R	
 229 WATERFORD STREET EDINBORO, PA 16412 USA			DRAWN BY: DT DATE: 6/27/2024 CHK'D: PJO	
			SCALE: 3:1	INTERPRET PER ASME Y14.5-2009
			FILE: 5J29	
SEE TABLE			CAT. NO.	DWG. NO. ABL-2R, ABL-1/0R
				REV. -