


(STUD HOLE)



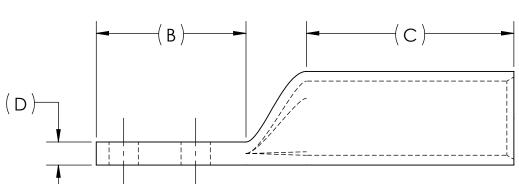



## NOTES:

- 1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
- 2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
- 3. TIN-PLATED TO INHIBIT CORROSION
- 4. RATED FOR COPPER CONDUCTORS ONLY

**→**-( F )--

- 5. BEVELED ENTRY FOR EASY CABLE INSERTION
- 6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
- 7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
- 8. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C



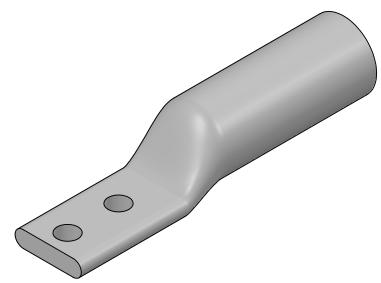

**USE BELOW OPTIONAL SUFFIXES FOR** 

**ALTERNATE LUG CONFIGURATIONS:** 


-FL FOR FLARED BARREL ENTRY


EXAMPLE: BBLU-075D-2TC38-NT-FL

-45 FOR 45° BENT PAD

-90 FOR 90° BENT PAD

-U FOR UNDRILLED PAD



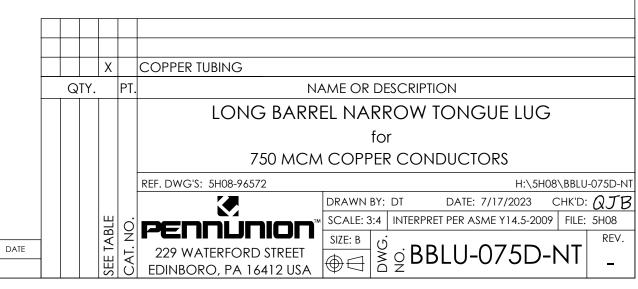



ECN

REVISIONS