

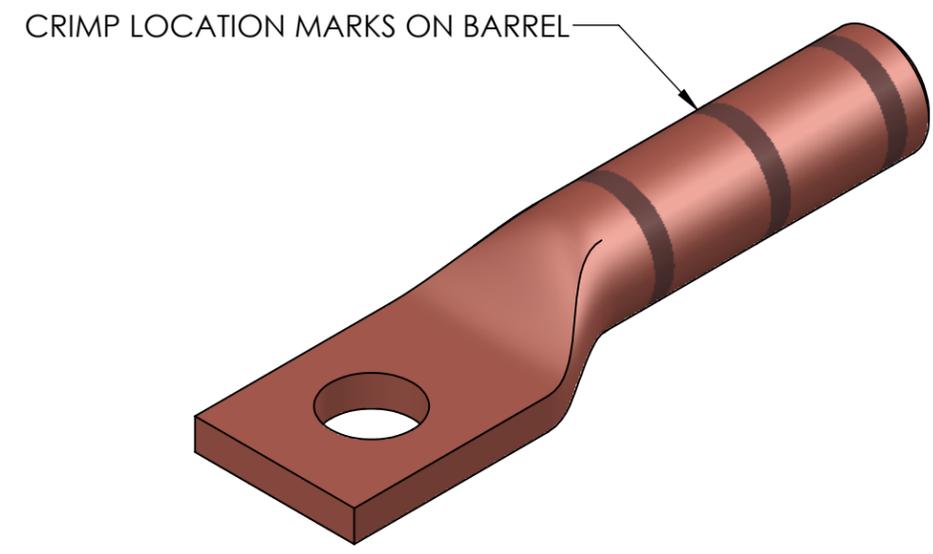


REV.	CAT. NO.	STUD HOLE	DIMENSIONS					APPROX. WEIGHT (LB)	STRIP LENGTH
			A	B	C	D	E		
01	BBLU-8S-GND	#10	1.57	.50	.81	.08	.41	0.015	.88
01	BBLU-8S2-GND	1/4	1.69	.63	.81	.08	.44	0.016	
01	BBLU-8S3-GND	5/16	1.75	.67	.81	.06	.51	0.016	

METAL STAMP TO READ:

1. PENN-UNION
2. 8 AWG
3. "CAT. NO."
4. DB
5. DIE 49
6. 

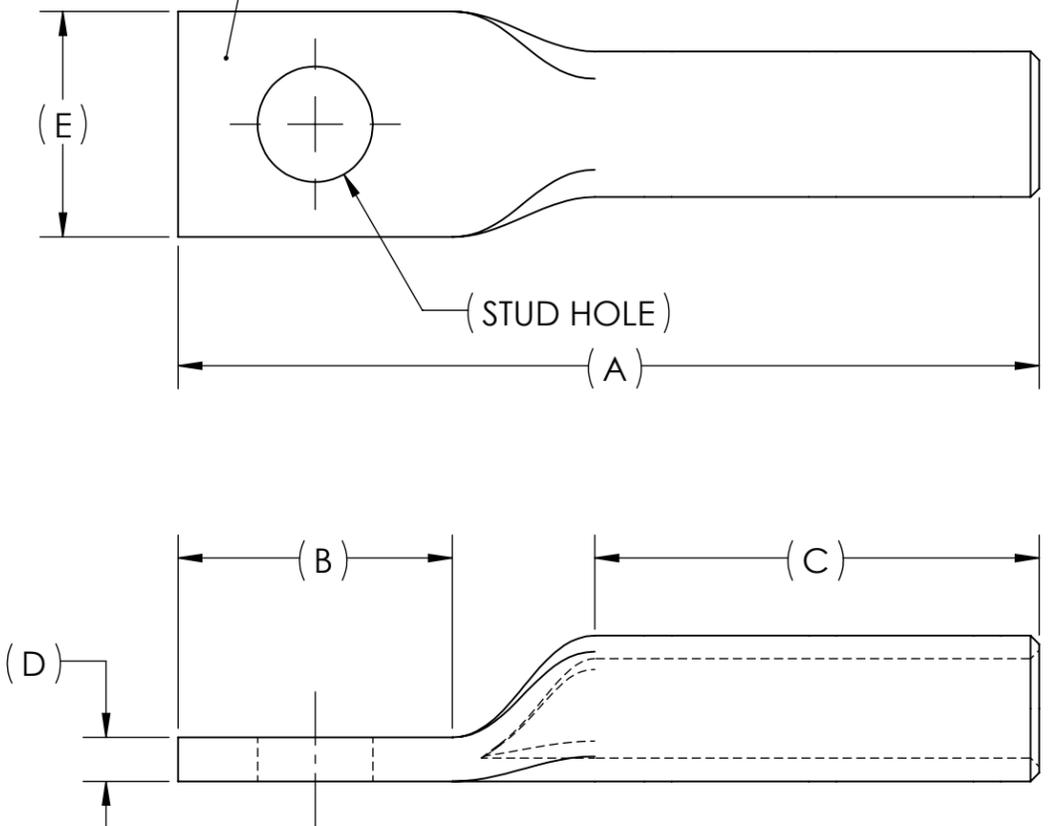

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
3. RATED FOR COPPER CONDUCTORS ONLY
4. BEVELED ENTRY FOR EASY CABLE INSERTION
5. PREFILLED WITH COPPER-BASED OXIDE INHIBITOR AND CAPPED TO PREVENT FOREIGN MATERIALS FROM ENTERING AND CONTAMINATING CONNECTORS PRIOR TO USE
6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
8. CONNECTORS ARE cULus LISTED PER UL486A-B FOR POWER APPLICATIONS UP TO 90°C
9. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467

				X					COPPER TUBING
				QTY.	PT.	NAME OR DESCRIPTION			
						COMPRESSION GROUNDING LUG for 8 SOL. AND 8 STR. COPPER CONDUCTORS			
						REF. DWG'S: 5H08-96707, 96708, 96709		H:\5H08\BBLU-8S-GND	
						 229 WATERFORD STREET EDINBORO, PA 16412 USA		DRAWN BY: DT DATE: 8/16/2023 CHK'D: QJB SCALE: 3:1 INTERPRET PER ASME Y14.5-2009 FILE: 2H02	
						SIZE: B	DWG. NO. BBLU-8S-GND		REV. -

NO.	ECN	DATE
REVISIONS		