


Long Barrel - Two Hole Tongue with Inspection Window (Size 4 AWG and Larger)

Type BBLU-D-GND

- Specially designed for grounding applications
- Manufactured from high conductivity seamless copper tubing
- Factory prefilled with copper-based oxide inhibitor
- Beveled entry for easy cable insertion
- Inspection window to ensure full cable insertion (size 4 AWG and larger)
- Compatible with industry standard 12-ton u-dies
- Connectors are cULus listed:
 - UL486A-B for power applications (90°C)
 - UL467 for grounding, bonding, and direct burial applications in earth or concrete
 - Suitable for use in circuits rated up to 35 kV
 - Connectors are cULus listed with both Penn-Union and Burndy tooling

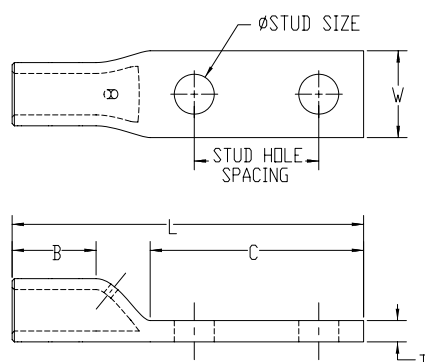

CATALOG NUMBER	COPPER CONDUCTOR SIZE	STUD HOLE SIZE	FIGURE DIMENSIONS (IN.)						INSTALLATION TOOLING		
			STUD HOLE SPACING	TONGUE WIDTH "W"	TONGUE LENGTH "C"	TONGUE THICKNESS "T"	BARREL LENGTH "B"	OVERALL LENGTH "L"	BURNDY DIE INDEX NO.	PENN-UNION DIE CATALOG NO.	WIRE STRIP LENGTH
BBLU-8D-GND	8 Str.	1/2	1.75	.83	3.00	.04	.78	4.09	49	T-49	7/8"
BBLU-6D-2TC38E2-GND	6 Sol./6 Str.	3/8	.75	.58	1.98	.06	1.12	3.42	7	T-7	1-3/16"
BBLU-6D-GND	6 Str.	1/2	1.75	.83	3.00	.04	1.09	4.40			
BBLU-4D-GND	4 Str.	1/2	1.75	.83	3.00	.05	1.09	4.45	8	T-8	1-3/16"
BBLU-2D-2TC38-GND	2 Sol./2 Str.	3/8	1.00	.60	1.82	.10	1.25	3.48	10	T-10	1-5/16"
BBLU-2D-2TC38E2-GND	2 Sol./2 Str.	3/8	.75	.60	1.99	.10	1.25	3.66			
BBLU-2D-GND	2 Str.	1/2	1.75	.83	3.00	.07	1.22	4.64			
BBLU-1/0D-GND	1/0 Str.	1/2	1.75	.83	3.00	.10	1.35	4.81	12	T-12	1-7/16"
BBLU-2/0D-GND	2/0 Str.	1/2	1.75	.83	3.00	.12	1.45	4.97	13	T-13	1-9/16"
BBLU-4/0D-GND	4/0 Str.	1/2	1.75	1.00	3.00	.14	1.57	5.17	15	T-15	1-11/16"
BBLU-025D-GND	250 kcmil	1/2	1.75	1.09	3.00	.16	1.57	5.21	16	T-16	1-11/16"
BBLU-050D-GND	500 kcmil	1/2	1.75	1.52	3.00	.23	2.20	6.08	20	T-20	2-5/16"