



1. PUC
2. "CAT. NO."
3. "CONDUCTOR SIZE"
4. CU


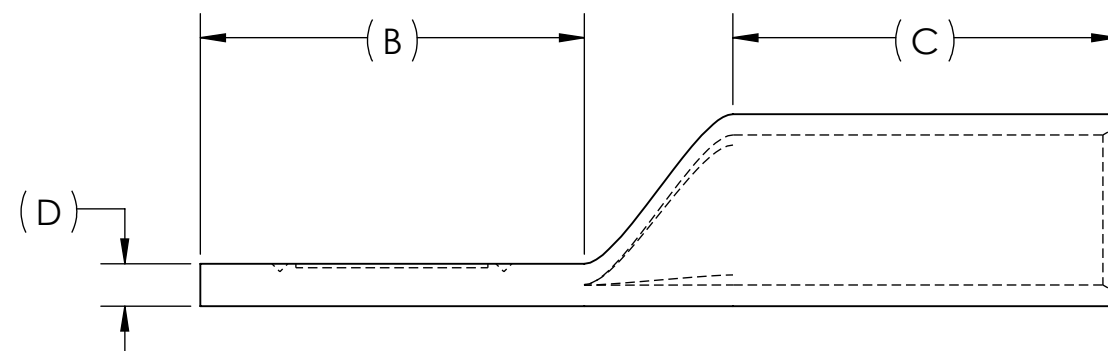


1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
3. TIN-PLATED TO INHIBIT CORROSION
4. RATED FOR COPPER CONDUCTORS ONLY
5. BEVELED ENTRY FOR EASY CABLE INSERTION
6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
8. CONNECTORS ARE UL LISTED PER UL486A-B AND CSA CERTIFIED PER C22.2 NO.65 FOR POWER APPLICATIONS UP TO 90°C
9. CONNECTORS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467

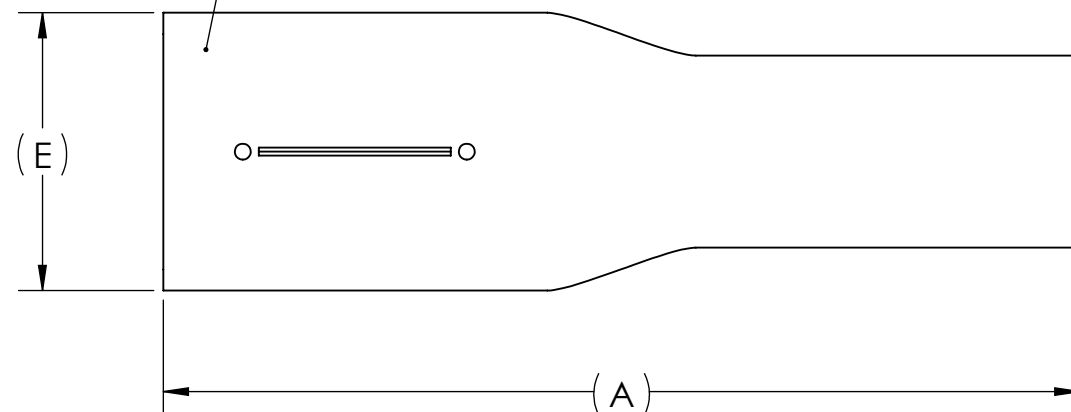

NO.	ECN	DATE
REVISIONS		

SCALE 1 : 1

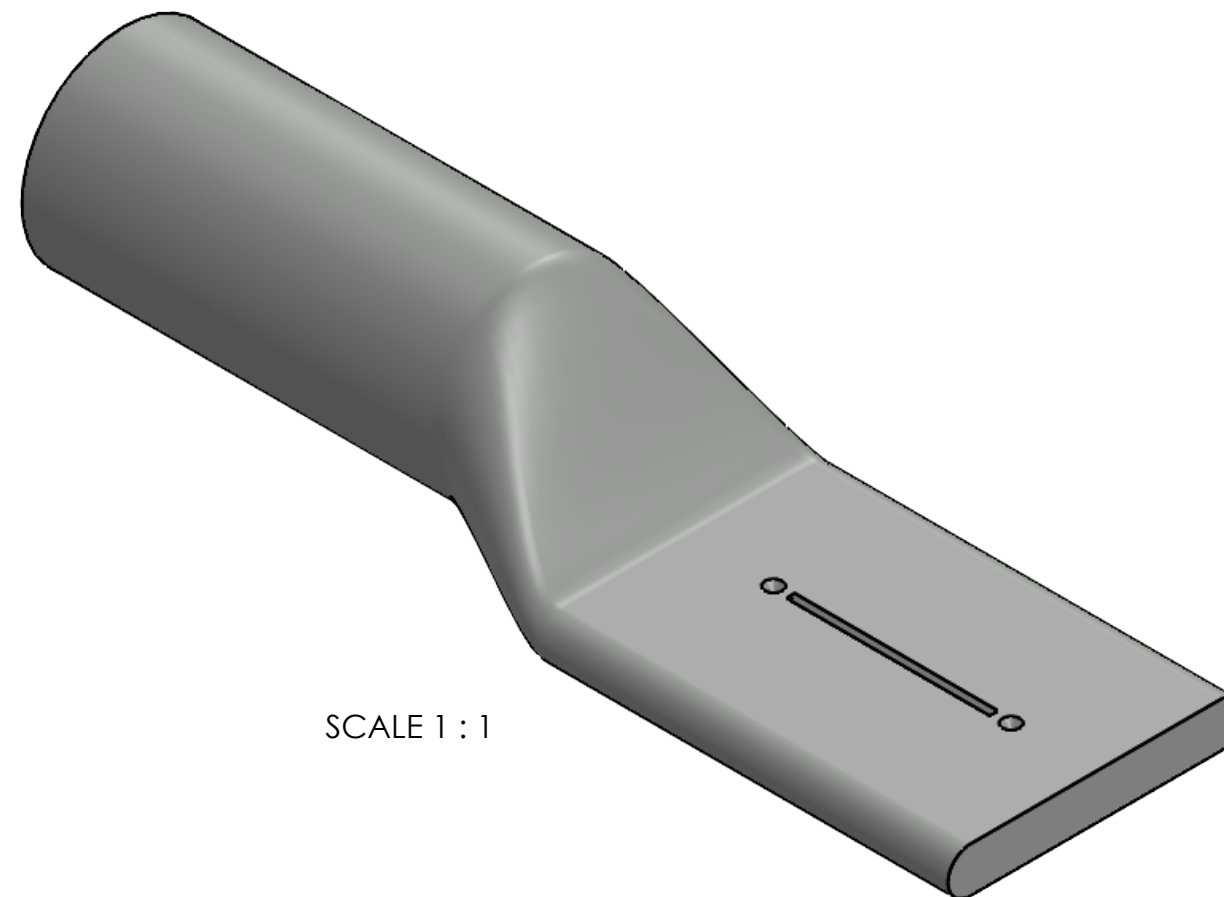[illegible]

DWG.
NO.

BBLU-DNU
SHEET 2 OF 2

REV.
-

REV.	CAT. NO.	CONDUCTOR SIZE	STUD HOLE	DIMENSIONS					DIE NO.	APPROX. WEIGHT (LB)	STRIP LENGTH
				A	B	C	D	E			
1	BBLU-8DNU	8 AWG	#10	4.19	3.00	.94	.12	.83	6	0.106	1-1/16
3	BBLU-6DNU	6 AWG	#10	4.35	3.00	1.13	.12	.83	7	0.107	1-1/4
-	BBLU-4DNU	4 AWG	#10	4.38	3.00	1.13	.10	.92	8	0.107	1-1/4
-	BBLU-3DNU	3 AWG	1/4	4.35	3.00	1.13	.12	.92	9	0.156	1-1/4
1	BBLU-2DNU	2 AWG	1/4	4.53	3.00	1.25	.10	.81	10	0.107	1-5/16
-	BBLU-1DNU *	1 AWG	1/4	4.12	2.77	1.20	.09	.70	Y644HS	0.081	1-5/16
-	BBLU-1/0DNU	1/0 AWG	1/4	4.63	3.00	1.38	.10	.81	12	0.120	1-1/2
-	BBLU-2/0DNU	2/0 AWG	1/4	4.84	3.00	1.50	.12	.82	13	0.147	1-5/8
-	BBLU-3/0DNU	3/0 AWG	1/4	4.91	3.00	1.50	.13	.89	14	0.174	1-5/8
1	BBLU-4/0DNU	4/0 AWG	1/4	5.10	3.00	1.63	.14	1.00	15	0.222	1-3/4
-	BBLU-025DNU	250 MCM	1/4	5.13	3.00	1.63	.16	1.09	16	0.274	1-3/4
-	BBLU-030DNU	300 MCM	1/4	5.59	3.00	2.00	.16	1.19	17	0.315	2-1/8
-	BBLU-035DNU	350 MCM	1/4	5.66	3.00	2.00	.17	1.28	18	0.347	2-1/8
-	BBLU-040DNU	400 MCM	3/8	5.79	3.00	2.13	.19	1.39	19	0.477	2-1/4
-	BBLU-050DNU	500 MCM	3/8	6.03	3.00	2.25	.21	1.53	20	0.557	2-3/8
-	BBLU-060DNU	600 MCM	3/8	6.56	3.00	2.69	.27	1.72	22	0.935	2-13/16
-	BBLU-065DNU	650 MCM	3/8	6.68	3.00	2.81	.27	1.78	300	0.998	2-15/16
-	BBLU-075DNU	750 MCM	3/8	6.85	3.00	2.88	.27	1.91	24	1.092	3
-	BBLU-080DNU	800 MCM	3/8	7.00	3.00	2.94	.25	1.97	25	1.067	3-1/16
-	BBLU-100DNU	1000 MCM	3/8	7.16	3.00	3.00	.33	2.17	27	1.585	3-1/8
-	BBLU-150DNU	1500 MCM	3/8	7.44	3.00	3.19	.39	2.69	31	2.431	3-5/16
-	BBLU-200DNU	2000 MCM	3/8	7.78	3.00	3.44	.47	3.08	34	3.453	3-9/16

* - NOT CSA CERTIFIED. NOT UL LISTED FOR GROUNDING AND BONDING APPLICATIONS.

QTY.				PT.	NAME OR DESCRIPTION									
					LONG BARREL BLANK TONGUE LUG for COPPER CONDUCTORS									
CAT. NO.					REF. DWG'S: 2H08-43726				H:\2H08\BBLU-DNU					
					 229 WATERFORD STREET EDINBORO, PA 16412 USA				DRAWN BY: DT		DATE: 2/22/2023		CHK'D: MES	
									SCALE: 2:3		INTERPRET PER ASME Y14.5-2009		FILE: 2H08	
									SIZE: B		DWG. NO. BBLU-DNU		REV. -	
							SHEET 2 OF 2							

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO PENN-UNION CO. LLC. IT IS SUBMITTED IN CONFIDENCE AND IS TO BE USED SOLELY FOR THE PURPOSE FOR WHICH IT IS FURNISHED AND MUST BE RETURNED UPON REQUEST. THIS DOCUMENT AND SUCH INFORMATION IS NOT TO BE REPRODUCED, TRANSMITTED, DISCLOSED, OR USED OTHERWISE IN WHOLE OR IN PART WITHOUT THE EXPRESS CONSENT OF PENN-UNION CO. LLC.