
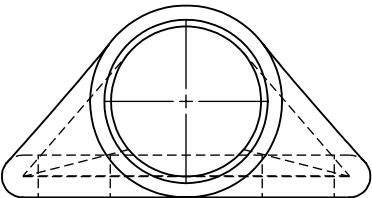
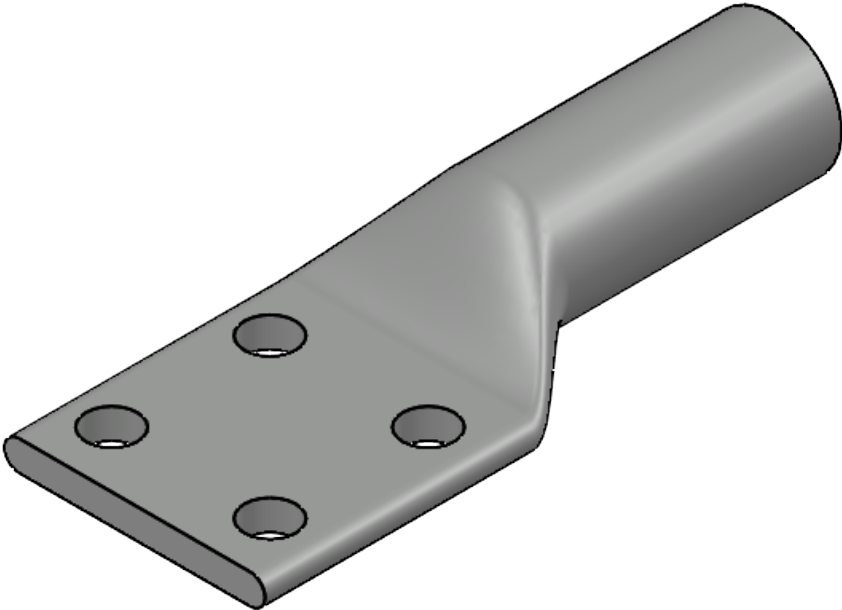


DWG. NO.	BBLU-FN	REV. -	REV.	CAT. NO.	CONDUCTOR SIZE	STUD HOLE SIZE	DIMENSIONS					APPROX. WEIGHT (LB)	COLOR CODE	BURNDY DIE NO.	PENN DIE NO.	STRIP LENGTH
							A	B	C	D	E					
			-	BBLU-100-FN	1000 MCM	1/2	7.06	3.00	3.00	.33	2.88	1.721	WHITE	27	T-27P	3.13
			04	BBLU-125-FN	1250 MCM	1/2	7.44	3.00	3.19	.30	3.00	2.076	YELLOW	29	-	3.89
			-	BBLU-150-FN	1500 MCM	1/2	7.41	3.00	3.06	.39	3.00	2.437	GREEN	31	T-31P	3.19
			-	BBLU-175-FN	1750 MCM	1/2	7.88	3.00	3.09	.39	2.91	2.756	GRAY	33	-	3.19
			-	BBLU-200-FN	2000 MCM	1/2	7.75	3.00	3.44	.47	3.08	3.294	BROWN	34	-	3.56

METAL STAMP TO READ:
1. PENN-UNION OR PUC
2. "CAT. NO."
3. "CONDUCTOR SIZE"
4. CU

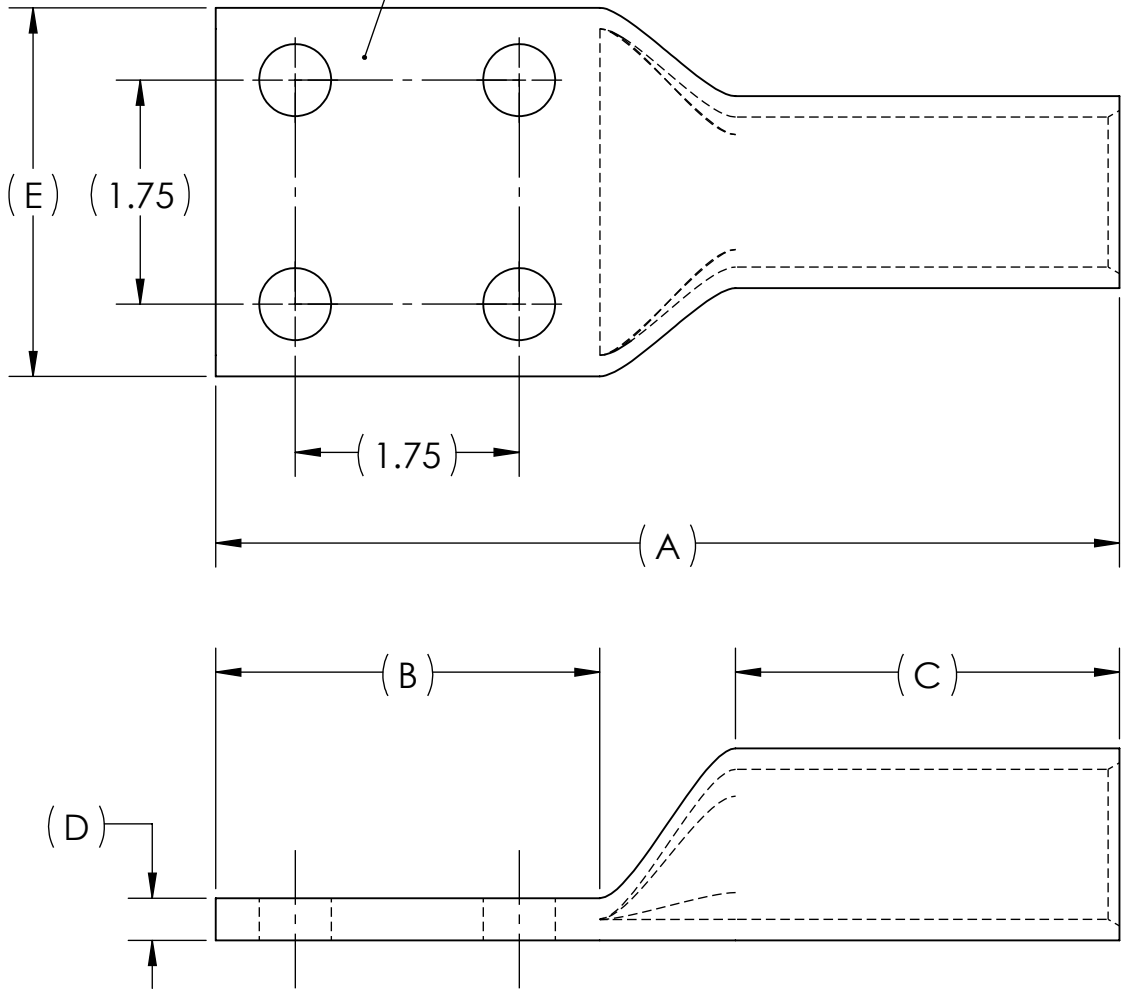

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - TIN-PLATED TO INHIBIT CORROSION
 - RATED FOR COPPER CONDUCTORS ONLY
 - BEVELED ENTRY FOR EASY CABLE INSERTION
 - FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
 - CONNECTORS UL LISTED PER UL486A-B FOR POWER APPLICATIONS UP TO 90°C

NO.	ECN	DATE
REVISIONS		

QTY.		PT.		NAME OR DESCRIPTION	
				PENN-CRIMP LUG	
				for	
				FOR COPPER WIRE	
				REF. DWG'S: 5H08-97135, 5H08-97705, 5H08-97134, 2H08-55870, 2H08-55871	
				H:\5H08\BBLU-FN	
				DRAWN BY: DT	
				DATE: 2/22/2023	
				CHK'D: MES	
				SCALE: 2:3	
				INTERPRET PER ASME Y14.5-2009	
				FILE: 5H08	
				SIZE: B	
				DWG. NO.	
				BBLU-FN	
				REV.	
				-	