
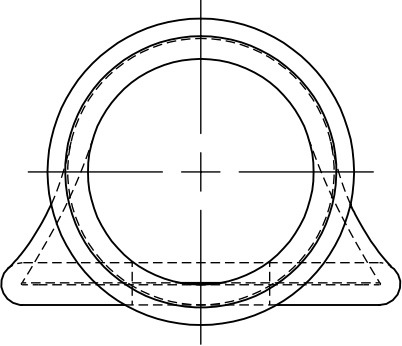
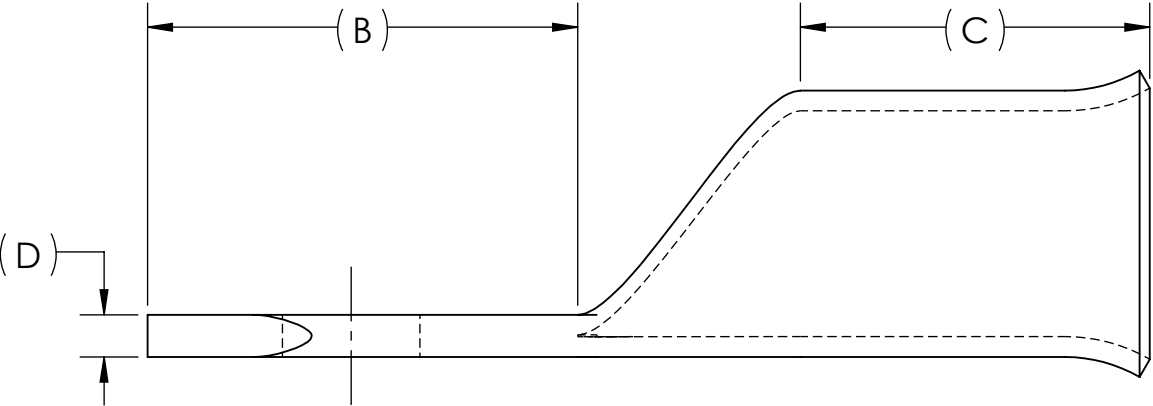


DWG. NO.


BL4/0-FL

REV.
-

METAL STAMP TO READ:
1. "CAT. NO."
2. PUC
3. 4/0-"STUD HOLE"
4. 

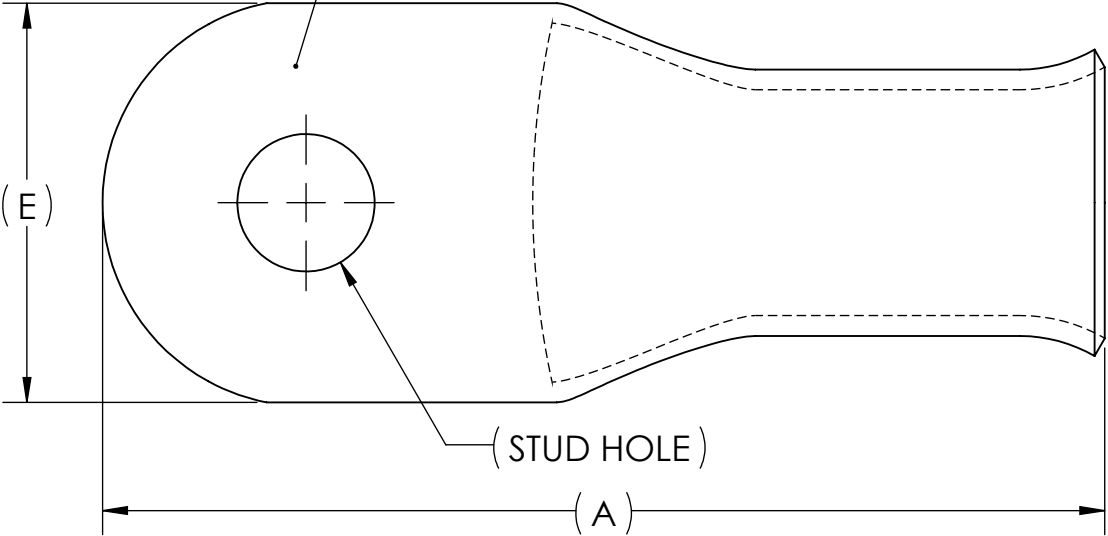

REV.	CAT. NO.	STUD HOLE	DIMENSIONS					APPROX. WEIGHT (LB)	PENN-UNION DIELESS TOOLING (NO. OF CRIMPS)	STRIP LENGTH
			A	B	C	D	E			
03	BL4/0516FL	5/16	2.61	1.12	.91	.11	1.04	0.084	TPU-6 (1) TDH-1000 (1)	1.06
03	BL4/038FL	3/8	2.61	1.12	.91	.11	1.04	0.084		
03	BL4/012FL	1/2	2.61	1.12	.91	.11	1.04	0.080		
03	BL4/058FL	5/8	2.61	1.12	.91	.11	1.04	0.084		

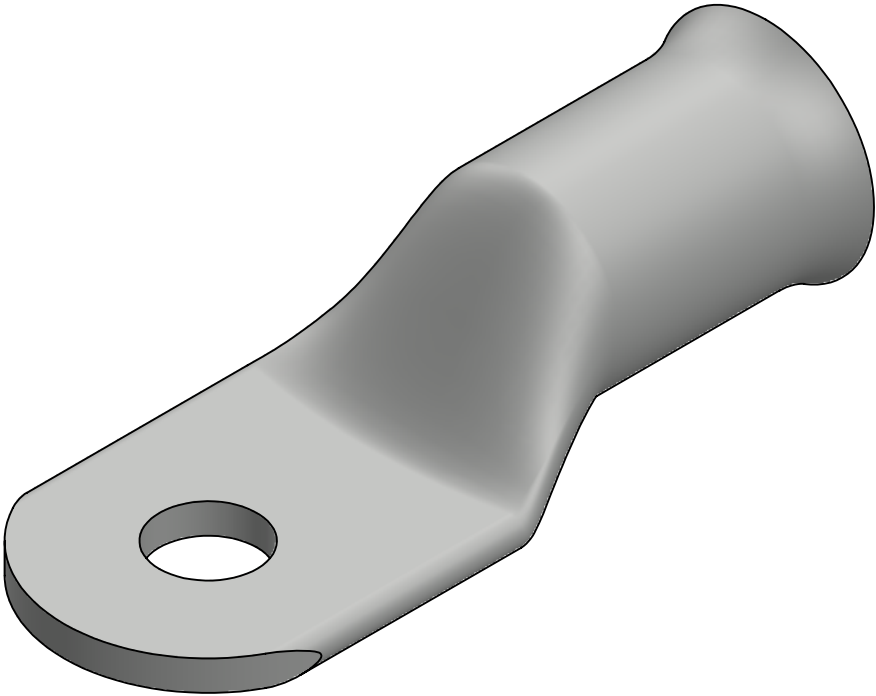

NOTES:
1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SEE INSTALLATION SHEET FOR WIRE SIZE AND TOOLING RECOMMENDATIONS
3. TIN-PLATED TO INHIBIT CORROSION
4. RATED FOR COPPER CONDUCTORS ONLY
5. BEVELED ENTRY FOR EASY CABLE INSERTION
6. CONNECTORS ARE SUITABLE FOR VOLTAGES UP TO 35 KV
7. FOR APPLICATIONS GREATER THAN 2000 VOLTS, CONSULT CABLE MANUFACTURER FOR VOLTAGE STRESS RELIEF INSTRUCTIONS
8. CONNECTORS ARE UL LISTED PER UL486A-B FOR POWER APPLICATIONS UP TO 90°C

RoHS COMPLIANT

NO.	ECN	DATE
REVISIONS		

QTY.	PT.	NAME OR DESCRIPTION
		COPPER TUBING
		COPPER BATTERY LUG for 4/0 AWG COPPER CONDUCTORS

REF. DWG'S: 5H13-96916



229 WATERFORD STREET
EDINBORO, PA 16412 USA

DRAWN BY: DT
SCALE: 2:1
SIZE: B

DATE: 8/15/2023
INTERPRET PER ASME Y14.5-2009
FILE: 5H13

CHK'D: MES

DWG. NO.

BL4/0-FL

REV.
-

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO PENN-UNION CO. LLC. IT IS SUBMITTED IN CONFIDENCE AND IS TO BE USED SOLELY FOR THE PURPOSE FOR WHICH IT IS FURNISHED AND MUST BE RETURNED UPON REQUEST. THIS DOCUMENT AND SUCH INFORMATION IS NOT TO BE REPRODUCED, TRANSMITTED, DISCLOSED, OR USED OTHERWISE IN WHOLE OR IN PART WITHOUT THE EXPRESS CONSENT OF PENN-UNION CO. LLC.