
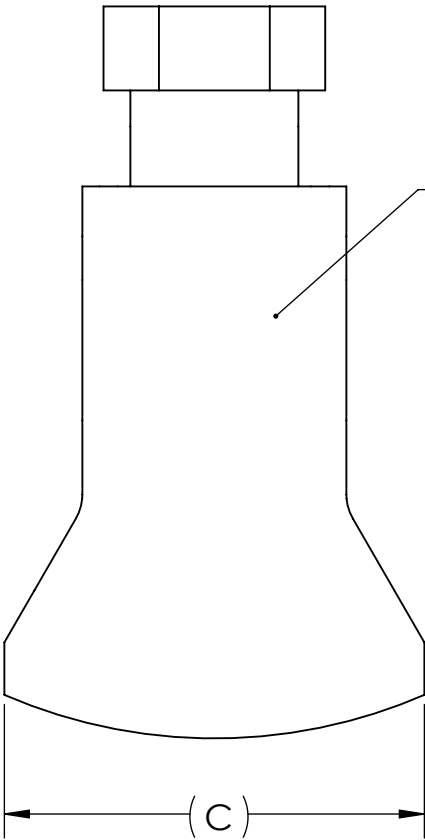


REV.	CATALOG NUMBER	ACCOMMODATES ROD SIZE (IN.)	CONDUCTOR RANGE	DIMENSIONS			APPROX. WEIGHT (LB)
				A	B	C	
09	CAB-1M	1/2	10 SOL. - 2 STR.	.59	.88	1.09	0.190
12	CAB-2M*	5/8	8 SOL. - 1/0 STR.	.66	1.00	1.16	0.184
04	CAB-3M	3/4	8 SOL. - 1/0 STR.	.59	1.25	1.38	0.276

* FOR 1/2" THREAD BOLT AND EXTRA LONG BODY, USE CAB-2ML


METAL STAMP TO READ:

1. DB
2.  US

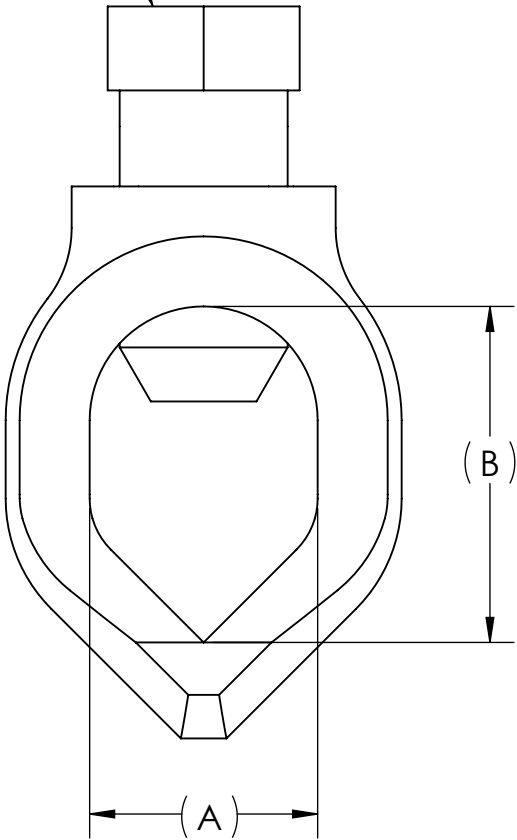

METAL STAMPING TO REAS:

1. PU
2. "CATALOG NUMBER"
3. "ROD SIZE"
4. "CONDUCTOR RANGE"

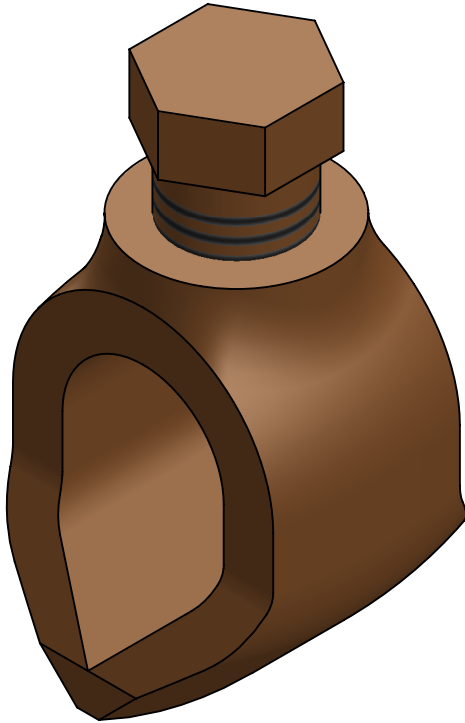

- NOTES:
1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. CONNECTORS ARE CULUS LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467
3. MANUFACTURED FROM CORROSION RESISTANT CAST ALUMINUM BRONZE
4. DESIGNED TO JOIN A RANGE OF CABLE TO COPPER CLAD, GALVANIZED STEEL AND STAINLESS STEEL GROUND RODS
5. SLIPS OVER END OF ROD FOR SINGLE WRENCH INSTALLATION
6. FURNISHED WITH SILICON BRONZE HEX HEAD BOLT
7. UL LISTED FOR DIRECT BURIAL IN EARTH AND CONCRETE
8. SOCKET HEAD SCREWS CAN BE FURNISHED BY SUFFIXING CATALOG NUMBER WITH "-S"
9. FOR TIN PLATING, SUFFIX CATALOG NUMBER WITH "-TN"

			1	SET SCREW
			1	BODY
QTY.		PT.		NAME OR DESCRIPTION
				BRONZE HEAVY DUTY GROUND ROD CLAMPS for CABLE TO GROUND RODS
REF. DWG'S: 1N03-20896				H:\1N03\CAB-M SERIES
 229 WATERFORD STREET EDINBORO, PA 16412 USA		DRAWN BY: DT		DATE: 6/18/2024
		SCALE: 2:1		CHK'D: PJO
		INTERPRET PER ASME Y14.5-2009		FILE: 1N03
SEE TABLE		CAT. NO.	DWG. CAB-M SERIES	
			REV. -	