
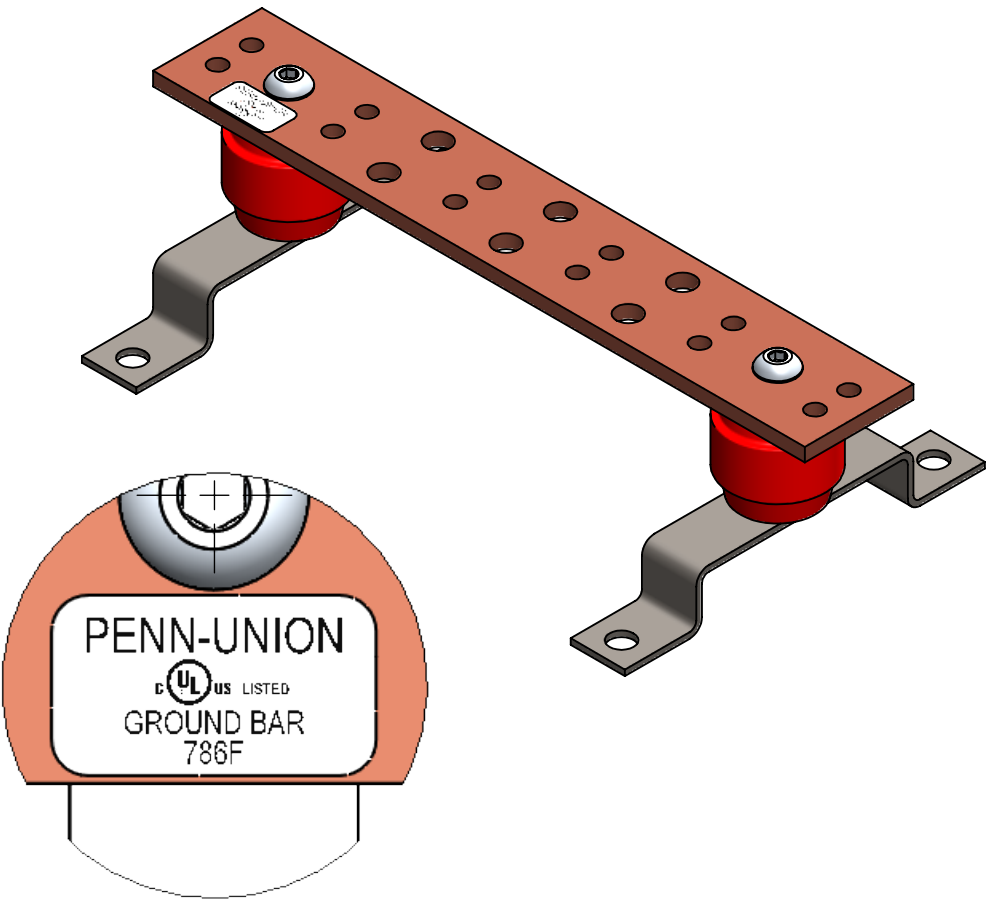


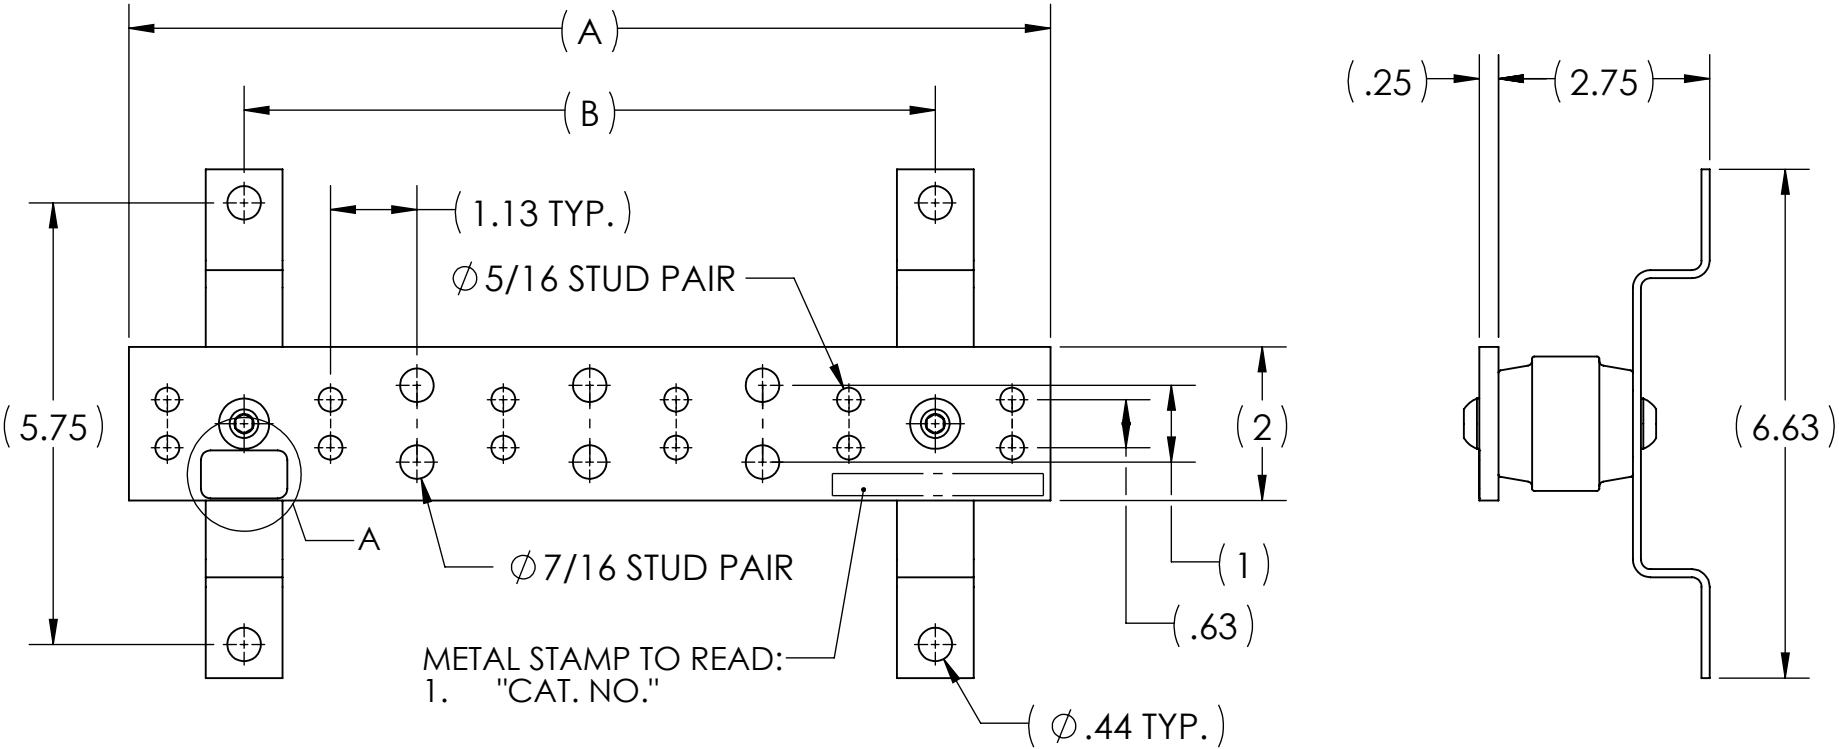

DETAIL A
SCALE 3 : 2

REV.	CAT. NO.	DIMENSIONS		7/16" HOLE PAIR QTY	5/16" HOLE PAIR QTY	WEIGHT (LBS)
		A	B			
02	CGB-6X2-MB	6.00	4.50	3	0	1.934
02	CGB-12X2-MB	12.00	9.00	3	6	2.825
02	CGB-14X2-MB	14.25	9.00	3	8	3.162
02	CGB-16X2-MB	16.50	9.00	3	10	3.499
02	CGB-18X2-MB	18.75	9.00	3	12	3.836
02	CGB-23X2-MB	23.25	18.00	3	14	4.487
02	CGB-27X2-MB	27.75	18.00	3	18	5.161

- NOTE:
- FOR TIN PLATED BUS BAR, SUFFIX CAT. NO. WITH "-TN"
 - FOR SILVER PLATED BUS BAR, SUFFIX CAT. NO. WITH "-SV"
 - FOR STAND ALONE GROUNDING BAR WITHOUT INSULATORS AND MOUNTING BRACKETS, REMOVE THE SUFFIX "-MB" FROM CAT. NO.

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - COPPER BAR MADE FROM C11000 COPPER ALLOY PER ASTM B187 AND IS 1/4 THICK
 - GLASS REINFORCED THERMOSET POLYESTER STANDOFF INSULATORS INDOOR RATING: 2000V, UL 94V-0
 - 300 SERIES STAINLESS STEEL MOUNTING BRACKETS ARE 12 GAUGE (.105) THICK MIN
 - GROUNDING BARS ARE cULus LISTED PER UL467/CSA C22.2 NO. 41-43 STANDARD FOR GROUNDING AND BONDING EQUIPMENT
 - UL 891, ANNEX G PANELBOARD AND SWITCHBOARD INSULATORS
 - ANSI/TIA/EIA-J-STD-607 TELECOMMUNICATIONS BONDING AND GROUNDING (EARTHING)

			1	7	CGB STUFFER SHEET (NOT SHOWN)
			1	6	LABEL, UL
			2	5	18-8 STAINLESS STEEL BOLT
			2	4	18-8 STAINLESS STEEL BOLT
			2	3	MOUNTING BRACKET, STAINLESS STEEL
			2	2	INSULATOR, STANDOFF (2000V)
			1	1	COPPER GROUNDING BAR
QTY.			PT.	NAME OR DESCRIPTION	
					COPPER GROUNDING BAR ASSEMBLY
SEE TABLE	CAT. NO.	REF. DWG'S: 2N91-56339 THROUGH 2N91-56344, 2N91-56380			
		H:\2N91\CGB-2 SERIES			
		DRAWN BY: DT		DATE: 9/12/2023	
		SCALE: 2:5		INTERPRET PER ASME Y14.5-2009	
		SIZE: B		FILE: 2N91	
 229 WATERFORD STREET EDINBORO, PA 16412 USA			DWG. NO.	CGB-2 SERIES	
				REV.	-