

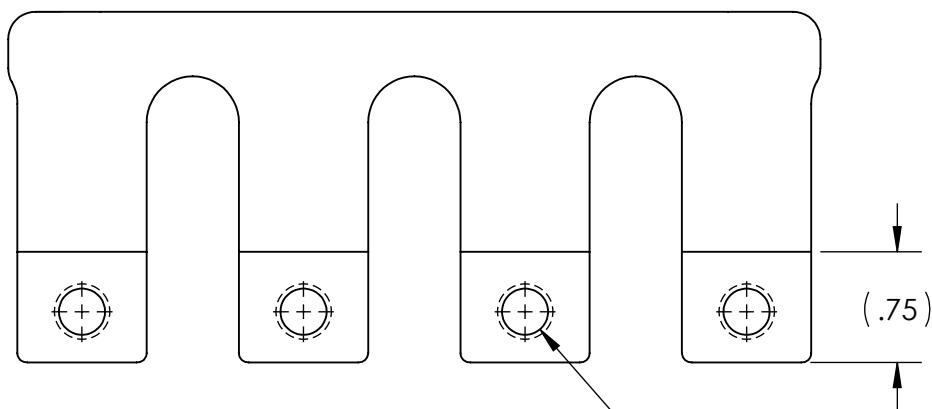


STAMP ON BOTTOM OF INSULATION TO READ:
1. PENN-UNION
2. DBA-4L
3. #6 STR. - 350 MCM

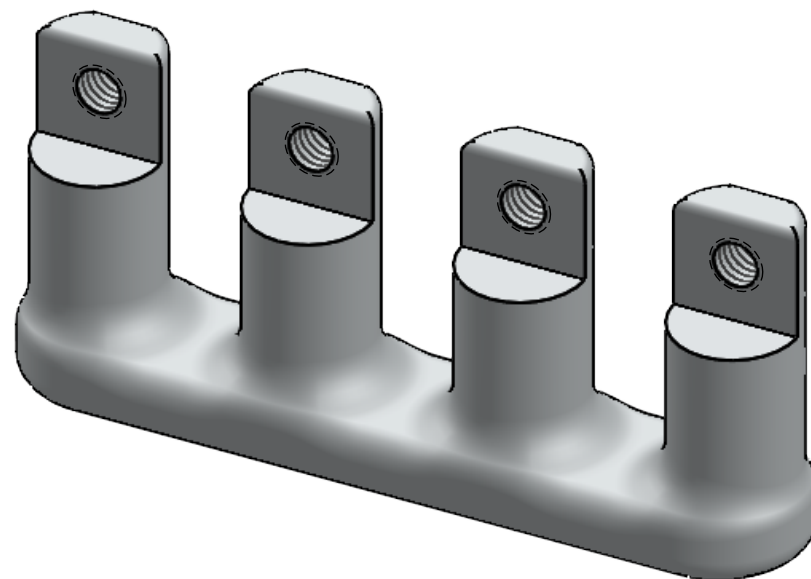

3/8" - 16 TAPPED HOLES

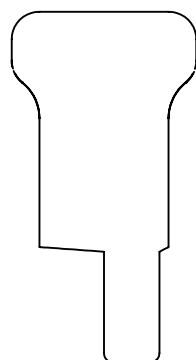

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. DESIGNED TO BE USED AS A MULTI-TAP SERVICE JUNCTION SUITABLE FOR USE IN ENCLOSURES AND DIRECT BURIAL APPLICATIONS
3. CONTACT PADS ALLOW NEW SERVICES TO BE ADDED AS NEEDED WITHOUT AFFECTING PREVIOUS INSTALLATIONS
4. CONNECTOR BODY IS INSULATED WITH HIGH STRENGTH DIELECTIC PLASTISOL
5. INSULATION WILL NOT SUPPORT COMBUSTION AND IS CHEMICAL AND ABRASION RESISTANT
6. WATER-TIGHT CAPS CAN BE REMOVED FOR THE ADDITION OF THE EPDM RUBBER FORCE FIT INSULATING SLEEVES (TYPE DBTBF)
7. FOR STREET LIGHTING TAP, SUFFIX CATALOG NUMBER WITH "-S"
EX. DBA-4L-S
8. FOR INSULATING SLEEVE FOR THE STREET LIGHTING TAP, CONSULT FACTORY
9. APPROX. WEIGHT: 0.663 LB



			1	1	INSULATED CAST ALUMINUM BODY							
QTY.			PT.	NAME OR DESCRIPTION								
					UNDERGROUND DIRECT BURIAL SERVICE CONNECTORS							
					for							
					ALUMINUM OR COPPER CONDUCTORS							
					REF. DWG'S: 3X09-44444			H:\3X09\DBA-4L				
							DRAWN BY: SUM		DATE: 12/13/2024		CHK'D:	
					PennUnion™		SCALE: 1:1		INTERPRET PER ASME Y14.5-2009		FILE: 3X09	
					229 WATERFORD STREET		SIZE: B		DWG. NO.		DBA-4L	
					EDINBORO, PA 16412 USA							
											REV. 11	