

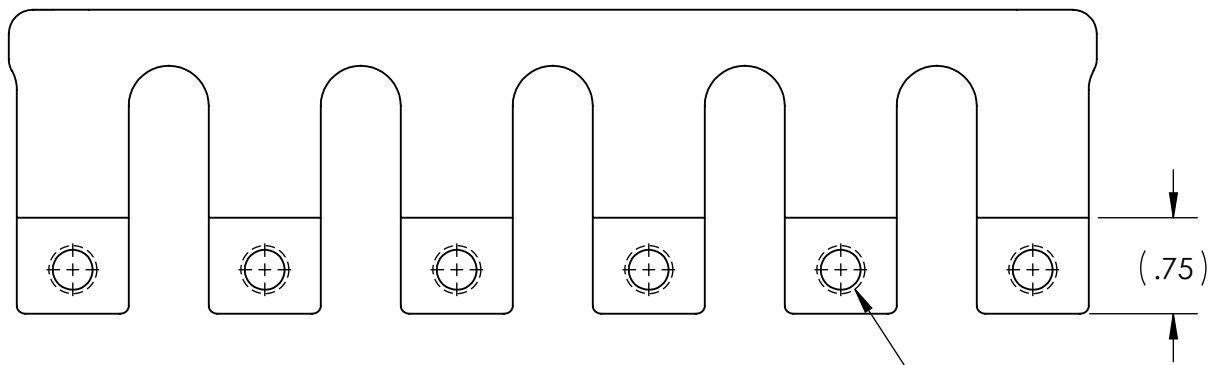
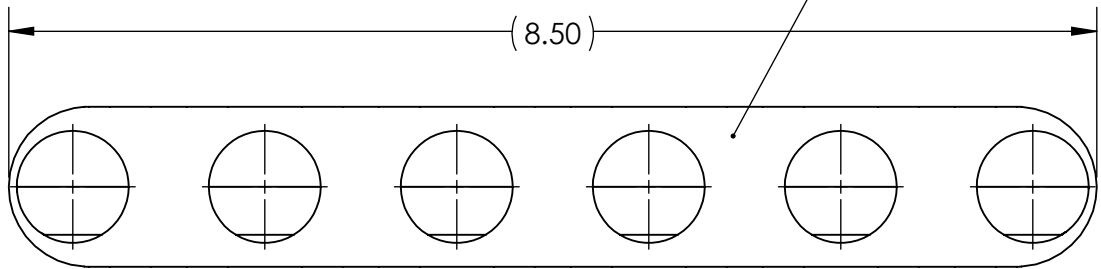


STAMP ON BOTTOM OF INSULATION TO READ:
1. PENN-UNION
2. DBA-6L
3. #6 STR. - 350 MCM



3/8" - 16 TAPPED HOLES

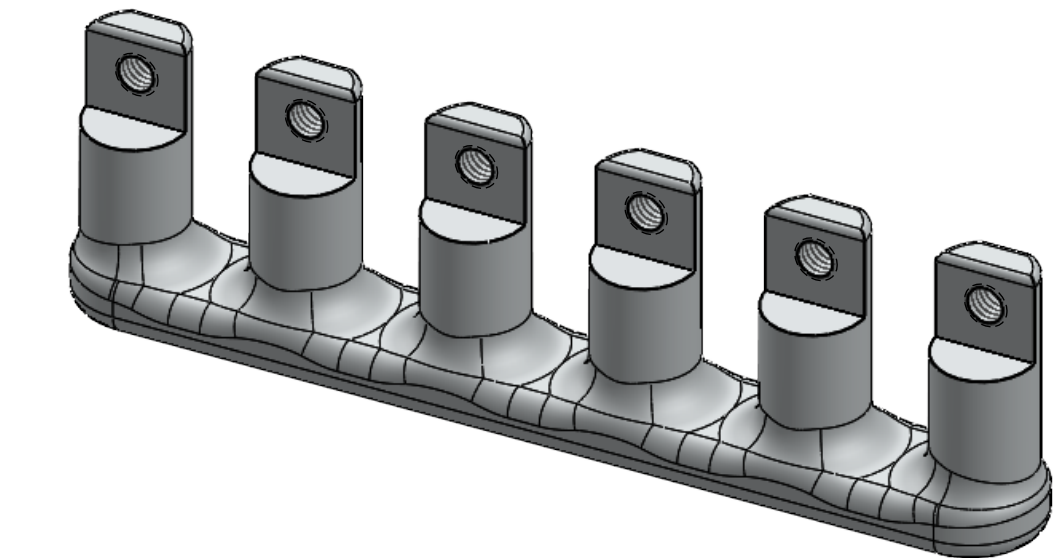

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. DESIGNED TO BE USED AS A MULTI-TAP SERVICE JUNCTION SUITABLE FOR USE IN ENCLOSURES AND DIRECT BURIAL APPLICATIONS
3. CONTACT PADS ALLOW NEW SERVICES TO BE ADDED AS NEEDED WITHOUT AFFECTING PREVIOUS INSTALLATIONS
4. CONNECTOR BODY IS INSULATED WITH HIGH STRENGTH DIELECTIC PLASTISOL
5. INSULATION WILL NOT SUPPORT COMBUSTION AND IS CHEMICAL AND ABRASION RESISTANT
6. WATER-TIGHT CAPS CAN BE REMOVED FOR THE ADDITION OF THE EPDM RUBBER FORCE FIT INSULATING SLEEVES (TYPE DBTBF)
7. FOR STREET LIGHTING TAP, SUFFIX CATALOG NUMBER WITH "-S"
EX. DBA-6L-S
8. FOR INSULATING SLEEVE FOR THE STREET LIGHTING TAP, CONSULT FACTORY
9. APPROX. WEIGHT: 1.017 LB



		1	1	INSULATED CAST ALUMINUM BODY			
QTY.		PT.		NAME OR DESCRIPTION			
				UNDERGROUND DIRECT BURIAL SERVICE CONNECTORS			
				for			
				ALUMINUM OR COPPER CONDUCTORS			
				REF. DWG'S: 3X09-43654		H:\3X09\DBA-6L	
				DRAWN BY: SUM		DATE: 12/15/2024	
				SCALE: 1:2		INTERPRET PER ASME Y14.5-2009	
				SIZE: B		FILE: 3X09	
				DWG. NO.		REV.	
				DBA-6L		DBA-6L	
				CAT. NO.		11	