
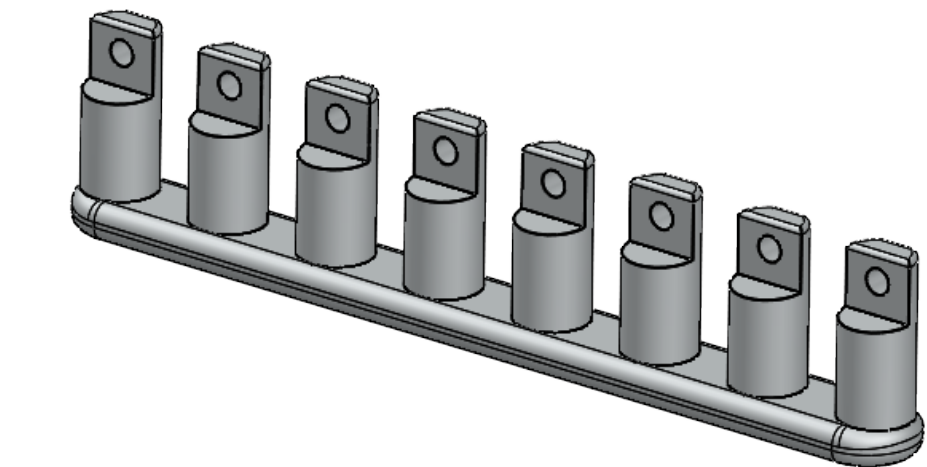


NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. DESIGNED TO BE USED AS A MULTI-TAP SERVICE JUNCTION SUITABLE FOR USE IN ENCLOSURES AND DIRECT BURIAL APPLICATIONS
3. CONTACT PADS ALLOW NEW SERVICES TO BE ADDED AS NEEDED WITHOUT AFFECTING PREVIOUS INSTALLATIONS
4. CONNECTOR BODY IS INSULATED WITH HIGH STRENGTH DIELECTIC PLASTISOL
5. INSULATION WILL NOT SUPPORT COMBUSTION AND IS CHEMICAL AND ABRASION RESISTANT
6. WATER-TIGHT CAPS CAN BE REMOVED FOR THE ADDITION OF THE EPDM RUBBER FORCE FIT INSULATING SLEEVES (TYPE DBTBF)
7. FOR STREET LIGHTING TAP, SUFFIX CATALOG NUMBER WITH "-S"
EX. DBA-8L-S
8. FOR INSULATING SLEEVE FOR THE STREET LIGHTING TAP, CONSULT FACTORY
9. APPROX. WEIGHT: 1.06 LB

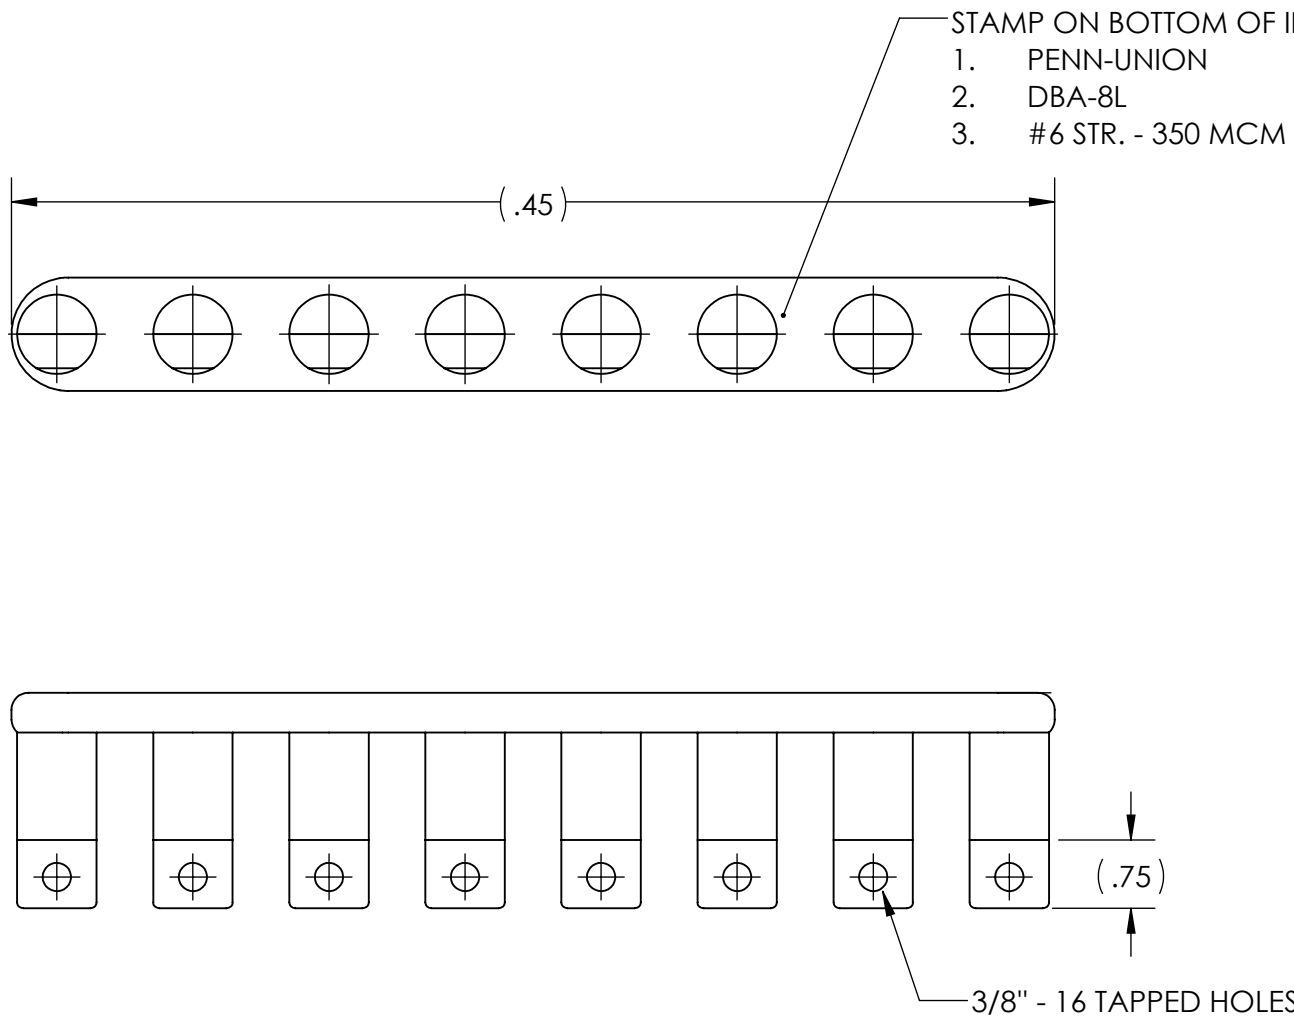

		1	1	INSULATED CAST ALUMINUM BODY		
	QTY.		PT.	NAME OR DESCRIPTION		
				UNDERGROUND DIRECT BURIAL SERVICE CONNECTORS		
				for		
				ALUMINUM OR COPPER CONDUCTORS		
				REF. DWG'S: 3X09-48037		
				H:\3X09\DBA-8L		
				DRAWN BY: SUM DATE: 11/4/2024 CHK'D: MES		
				SCALE: 16:1 INTERPRET PER ASME Y14.5-2009 FILE: 3X09		
				SIZE: B		
				DWG. NO. DBA-8L		
				REV. 10		