


FXB4 SERIES

ORDERING INFORMATION:

- "-S" SUFFIX DENOTES SLOTTED HOLES WHICH ARE SUITABLE FOR 1/2 OR 3/8 MOUNTING HARDWARE ON 1-1/2 OR 1-3/4 HOLE CENTERS
- FOR NEMA DRILLING, SUBSTITUTE "-N" FOR "-S" IN CATALOG NUMBER SUFFIX
- FOR LENGTHS OTHER THAN 12, CHANGE CATALOG NUMBER ACCORDINGLY (I.E. IF A 18 LENGTH IS DESIRED, CHANGE -12 TO -18)
- REMOVE "-Q" FORM CATALOG NUMBER SUFFIX FOR SILVER PLATED FERRULES
- "1" SUFFIX DENOTES SINGLE HOLED FERRULES

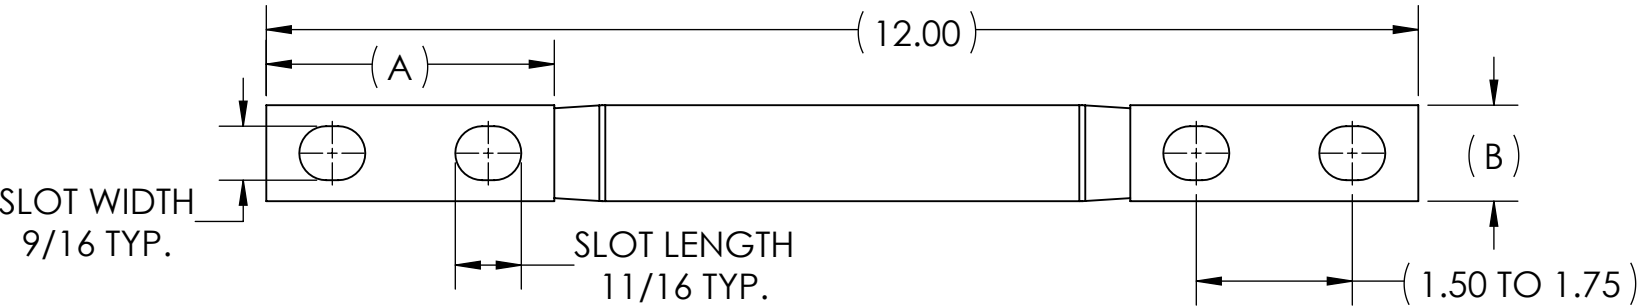


NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SUITABLE FOR ISOLATION OF VIBRATION COMMON IN GENERATOR, TRANSFORMER, TURBINE AND SUBSTATION INSTALLATIONS, COMPENSATION FOR COMPONENT MISALIGNMENT, THERMAL EXPANSION AND CONTRACTION, PERIMETER GROUNDING AND FENCING
3. TIN PLATED BRAID AND FERRULES FOR CORROSION PROTECTION
4. INSIDE ENDS OF FERRULES ARE CHAMFERED TO PREVENT STRAND DEGRADATION
5. BRAIDS ARE UL LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL467
6. BRAIDS ARE CSA CERTIFIED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER C22.2 NO.41
7. SIZE/COMBINATIONS NOT SHOWN CAN BE READILY SUPPLIED UPON REQUEST (SEE ORDERING INFORMATION ABOVE)

NO.	ECN	DATE
REVISIONS		

[illegible]

*AMPERE RATINGS ARE A SUGGESTED GUIDE ONLY. ACTUAL VALUES USED FOR A GIVEN APPLICATION WILL DEPEND ON PERMISSIBLE TEMPERATURE RISE, PERMISSIBLE VOLTAGE DROP, NUMBER OF CABLES TOGETHER, AND OTHER CONDITIONS OF SERVICE.

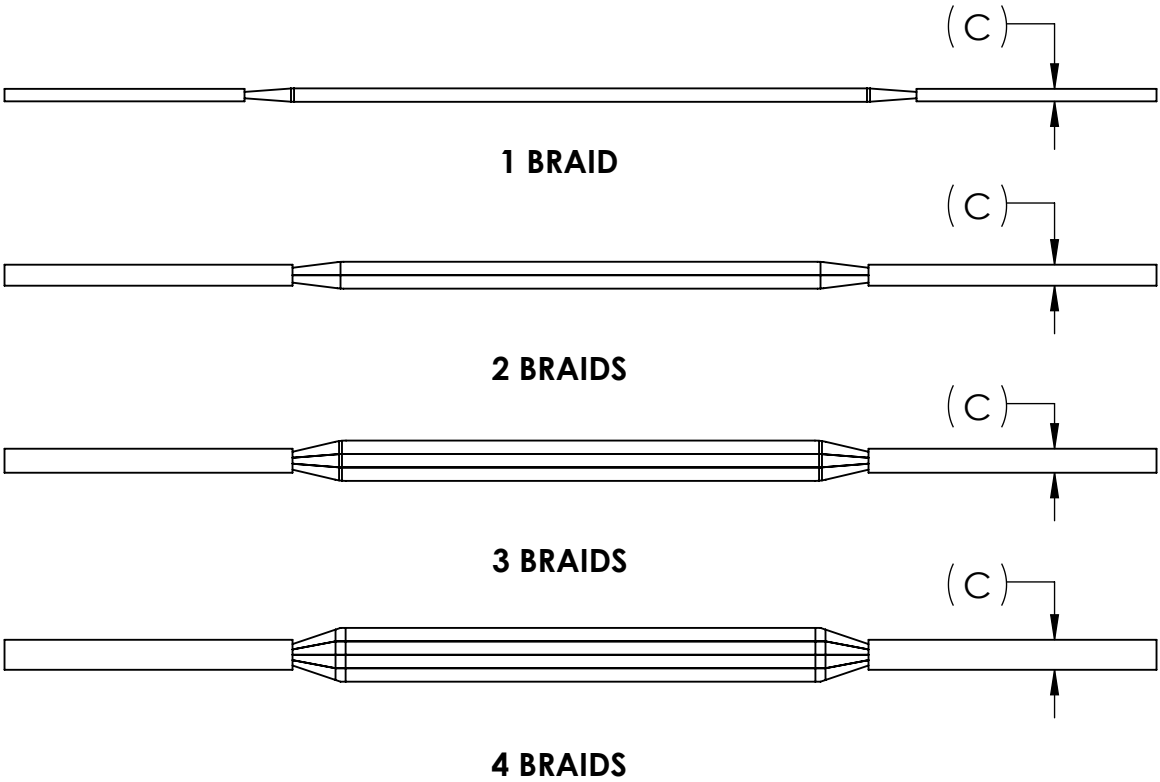

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO PENN-UNION CO. LLC. IT IS SUBMITTED IN CONFIDENCE AND IS TO BE USED SOLELY FOR THE PURPOSE FOR WHICH IT IS FURNISHED AND MUST BE RETURNED UPON REQUEST. THIS DOCUMENT AND SUCH INFORMATION IS NOT TO BE REPRODUCED, TRANSMITTED, DISCLOSED, OR USED OTHERWISE IN WHOLE OR IN PART WITHOUT THE EXPRESS CONSENT OF PENN-UNION CO. LLC.