


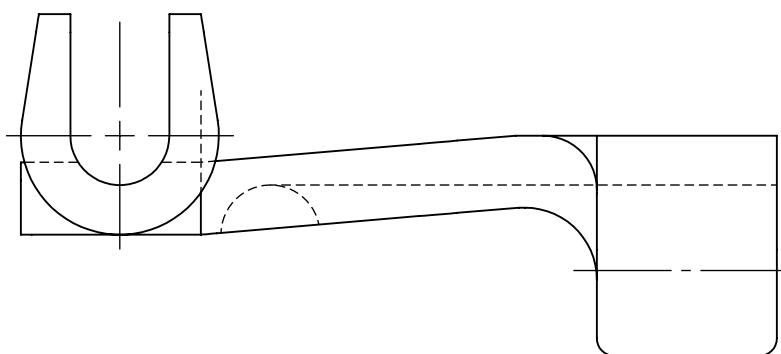

- | REV. | CAT. NO. | CONDUCTOR RANGE | | DIMENSIONS | | APPROX. WEIGHT (LB) |
|------|---------------|----------------------|----------------------|------------|------|---------------------|
| | | MAIN | TAP | A | B | |
| 03 | GGCP-1 | 2 STR. - 1 STR. | 2 STR. - 1 STR. | 2.63 | 2.62 | 0.230 |
| 02 | GGCP-2/0 | 1/0 STR. - 2/0 STR. | 1/0 STR. - 2/0 STR. | 3.63 | 3.63 | 0.537 |
| 01 | GGCP-025-2/0 | 4/0 SOL. - 250 KCMIL | 1/0 STR. - 2/0 STR. | 3.66 | 3.66 | 0.808 |
| 06 | GGCP-025 | 4/0 SOL. - 250 KCMIL | 4/0 SOL. - 250 KCMIL | 3.66 | 3.66 | 0.731 |
| 08 | GGCP-050-025 | 500 KCMIL | 4/0 SOL. - 250 KCMIL | 4.30 | 4.43 | 1.268 |
| 05 | GGCP-050 | 500 KCMIL | 500 KCMIL | 4.50 | 4.49 | 1.178 |
| 02 | GGCP-075-025 | 750 KCMIL | 4/0 SOL. - 250 KCMIL | 5.28 | 4.62 | 1.837 |
| 02 | GGCP-075-050 | 750 KCMIL | 500 KCMIL | 5.28 | 5.28 | 2.690 |
| 02 | GGCP-075 | 750 KCMIL | 750 KCMIL | 5.50 | 5.50 | 3.028 |
| 02 | GGCP-2U-4/0* | 4/0 STR. | 4/0 STR. | 3.67 | 3.67 | 0.782 |
| - | GGCP-2U-025* | 250 KCMIL | 250 KCMIL | 3.66 | 3.66 | 0.731 |
| 02 | GGCP-0255/8GR | 4/0 SOL. - 250 KCMIL | 5/8 GROUND ROD | 3.66 | 3.66 | 0.731 |
| 02 | GGCP-2/05/8GR | 1/0 STR. - 2/0 STR. | 5/8 GROUND ROD | 3.66 | 3.66 | 0.808 |
| 01 | GGCP-0253/4GR | 4/0 STR. - 250 KCMIL | 3/4 GROUND ROD | 4.30 | 4.43 | 1.268 |
| 01 | GGCP-2/03/4GR | 1/0 STR. - 2/0 STR. | 3/4 GROUND ROD | 4.30 | 4.43 | 1.268 |

[illegible]

CAT. NO.	INSTALLATION TOOLING								
	T&B			BURNDY			KEARNEY		
	TOOL	DIE	NO. OF CRIMPS	TOOL	DIE	NO. OF CRIMPS	TOOL	DIE	NO. OF CRIMPS
GGCP-1	15 TON 40 TON	54H 54	2 1	Y35+	BG	1	WH-1	5/8-1	2
GGCP-2/0	15 TON 40 TON	66	1	Y45L	251	1	PH-4	K-1 3/4	1
GGCP-025-2/0	15 TON 40 TON	87H 87	2 1	Y45L	299	1	PH-4	K-1-2	1
GGCP-025	15 TON 40 TON	87H 87	2 1	Y45L	299	1	PH-4	K-1-2	1
GGCP-050-025	15 TON 40 TON	115H 115	1	Y45L	936	2	PH-4	K-1 5/16H	2
GGCP-050	15 TON 40 TON	115H 115	1	Y45L	936	2	PH-4	K-1 5/16H	2
GGCP-075-025	40 TON	150	1	Y48BH	352	1	PH-4	K-1 1/2H	2
GGCP-075-050	40 TON	150	1	Y48BH	352	1	PH-4	K-1 1/2H	2
GGCP-075	40 TON	150	1	Y48BH	352	1	PH-4	K-1 1/2H	2
GGCP-2U-4/0	15 TON 40 TON	87H 87	2 1	Y45L	299	1	PH-4	K-1-2	1
GGCP-2U-025	15 TON 40 TON	87H 87	2 1	Y45L	299	1	PH-4	K-1-2	1
GGCP-0255/8GR	15 TON 40 TON	87H 87	2 1	Y45L	299	1	PH-4	K-1-2	1
GGCP-2/05/8GR	15 TON 40 TON	87H 87	2 1	Y45L	299	1	PH-4	K-1-2	1
GGCP-0253/4GR	15 TON 40 TON	115H 115	2 1	-	-	-	-	-	-
GGCP-2/03/4GR	15 TON 40 TON	115H 115	2 1	-	-	-	-	-	-

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - FIGURE IS REPRESENTATIVE, EXACT COMPONENT FEATURES MAY VARY
 - SUITABLE FOR DIRECT BURIAL IN CONCRETE OR EARTH



QTY.				PT.	NAME OR DESCRIPTION				
					GROUND CROSS GRID CONNECTOR for COPPER CONDUCTORS & GROUND ROD				
					REF. DWG'S: 1N83- 51993, 51973, 52204, 50731, 51896, 51895, 52127, 52126, 52124 H:\1N83\GGCP SERIES				
							DRAWN BY: MES		DATE: 2/10/2026
					229 WATERFORD STREET EDINBORO, PA 16412 USA		SCALE: 3:2		INTERPRET PER ASME Y14.5-2009
							SIZE: B		FILE: 1N83
									DWG. NO.
							GGCP SERIES		REV.
							SHEET 2 OF 2		-