
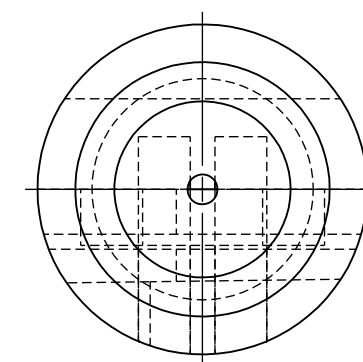
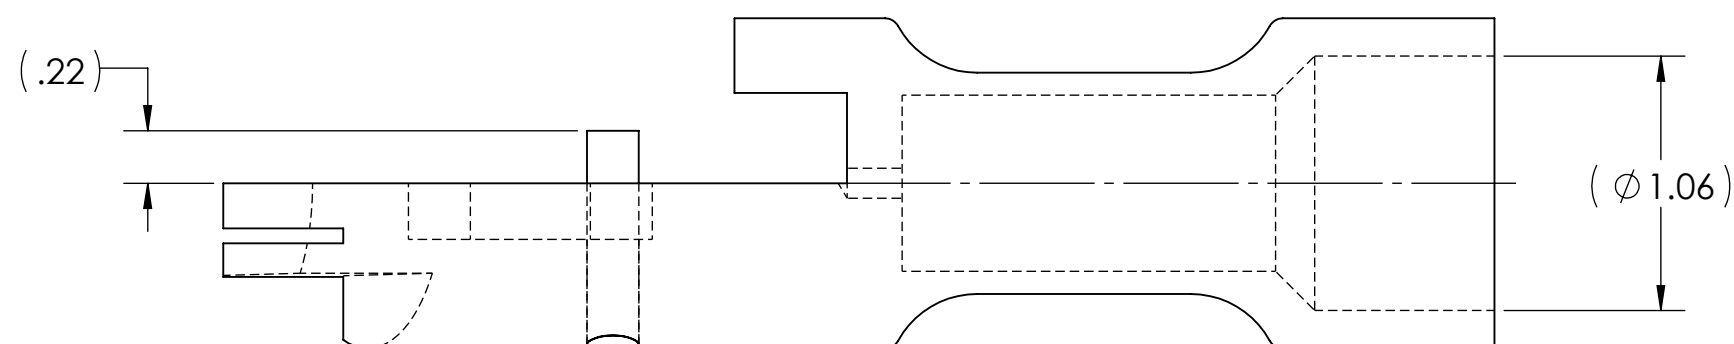
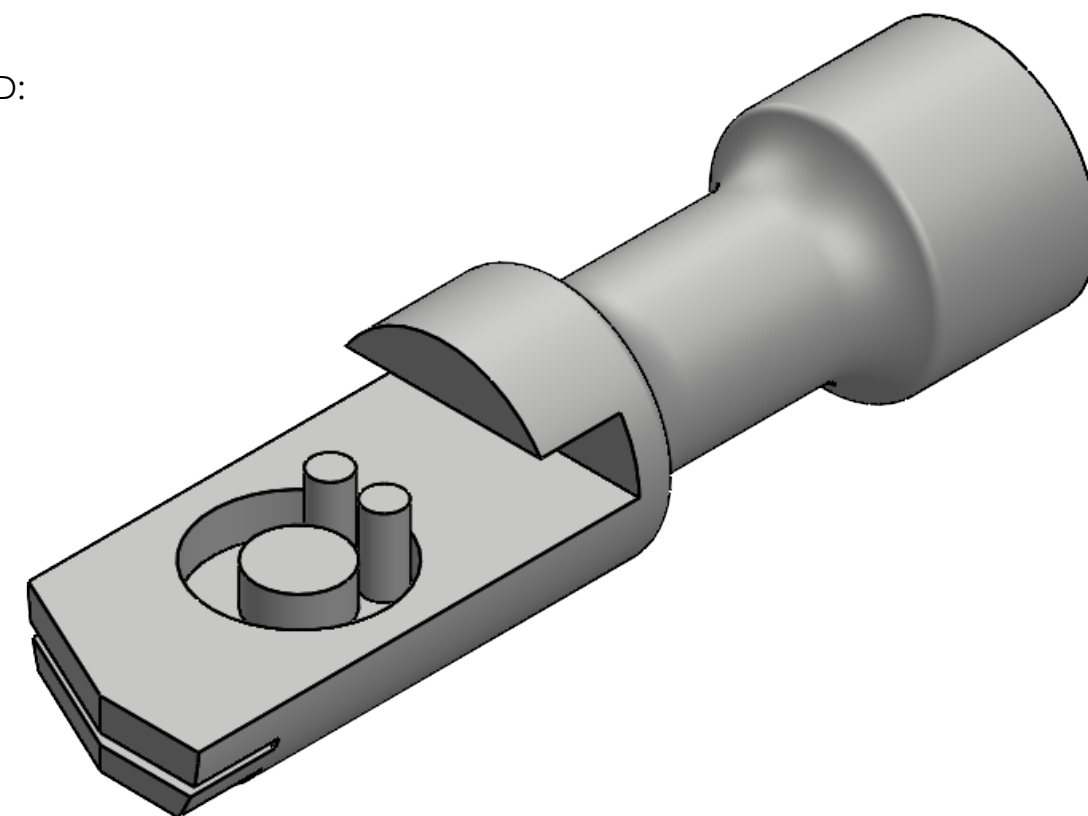


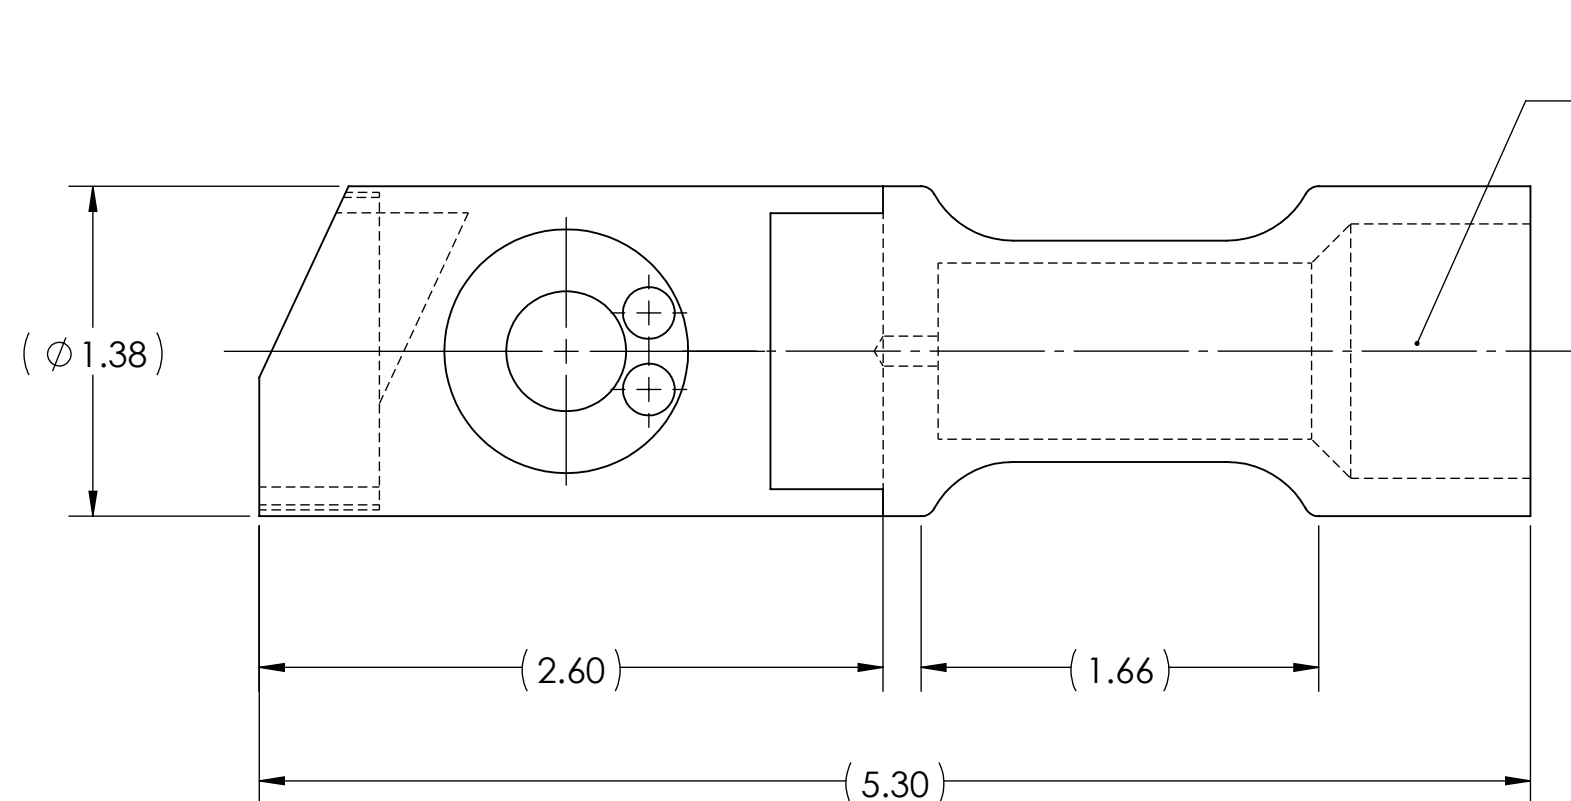

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SILVER PLATED TO WITHSTAND HIGHER OPERATING TEMPERATURES, PROVIDE GREATER CONDUCTIVITY, AND PROTECTION AGAINST CORROSION
3. STANDARD INTERFACE ALLOWS TERMINAL TO MATE WITH EXISTING DISCONNECT DESIGNS
4. WIRE STRIP LENGTH: 1-7/8"
5. MANUFACTURED FROM HIGH STRENGTH BRASS ALLOY
6. APPROXIMATE WEIGHT: 0.940 LBS

5	12222	12/28/2021
4	12199	8/9/2022
3	11978	10/15/2021
2	RED SLEEVE	3/10/2017
1	T-185H T-150HS	10/27/2011
NO.	ECN	DATE
REVISIONS		

				X		BRASS ALLOY																
QTY.				PT.	NAME OR DESCRIPTION																	
						CRIMPABLE GLAD HAND for 262 (650/24) DLO CABLE																
						REF. DWG'S: 2Z06-55919						H:\2Z06\GHD-262										
						 PennUnion™ 229 WATERFORD STREET EDINBORO, PA 16412 USA					DRAWN BY: CLT				DATE: 8/2/2023				CHK'D: MES			
											SCALE: 5:4				INTERPRET PER ASME Y14.5-2009				FILE: 2Z06			
											SIZE: B		DWG. NO.		GHD-262						REV.	
											5										5	