
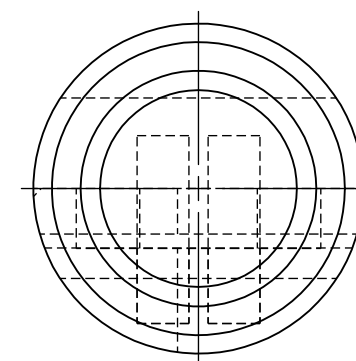
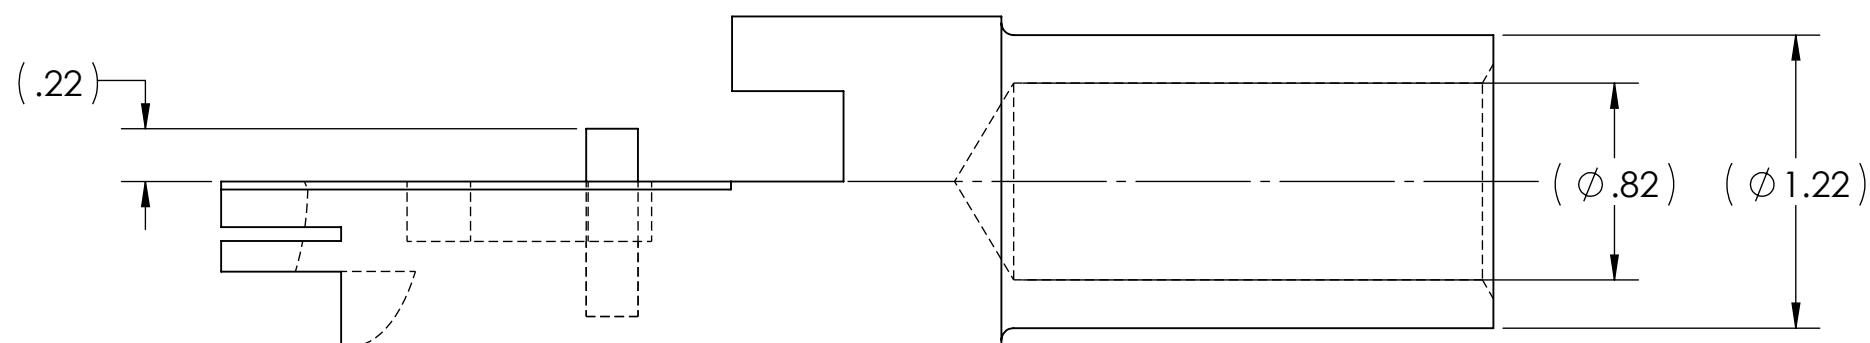
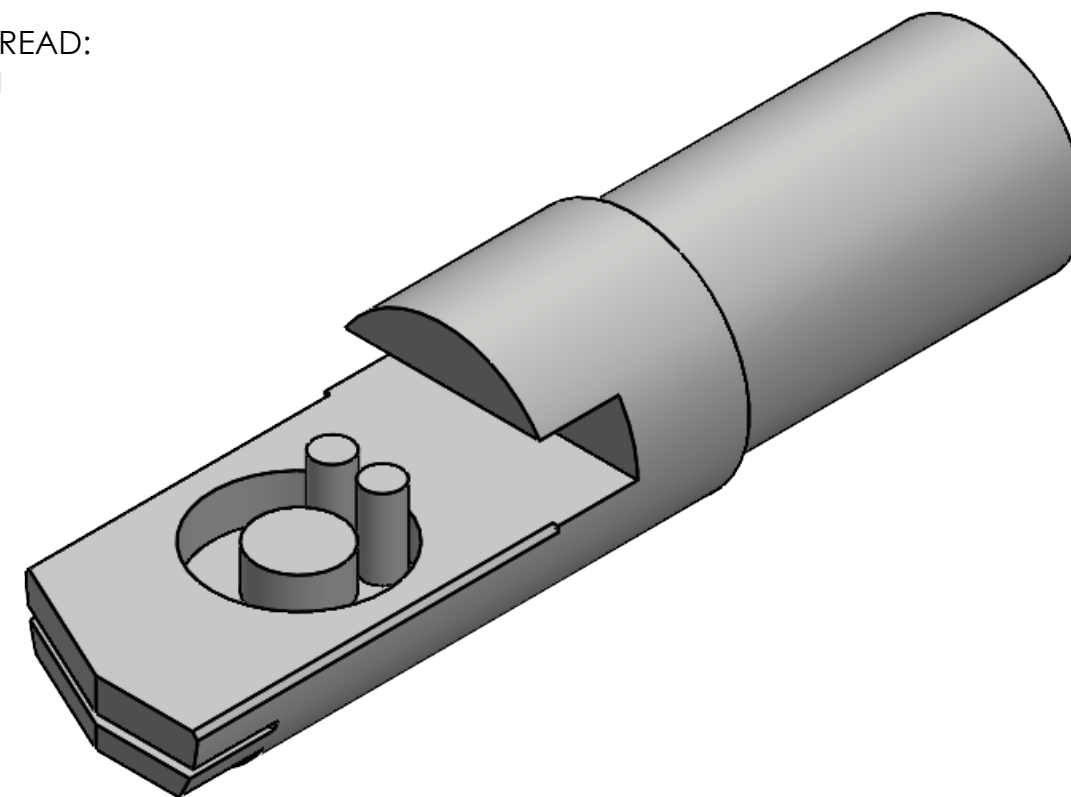


1. PENN-UNION
2. GHD-535-1
3. 535
4. 1325/24
5. T-400HS

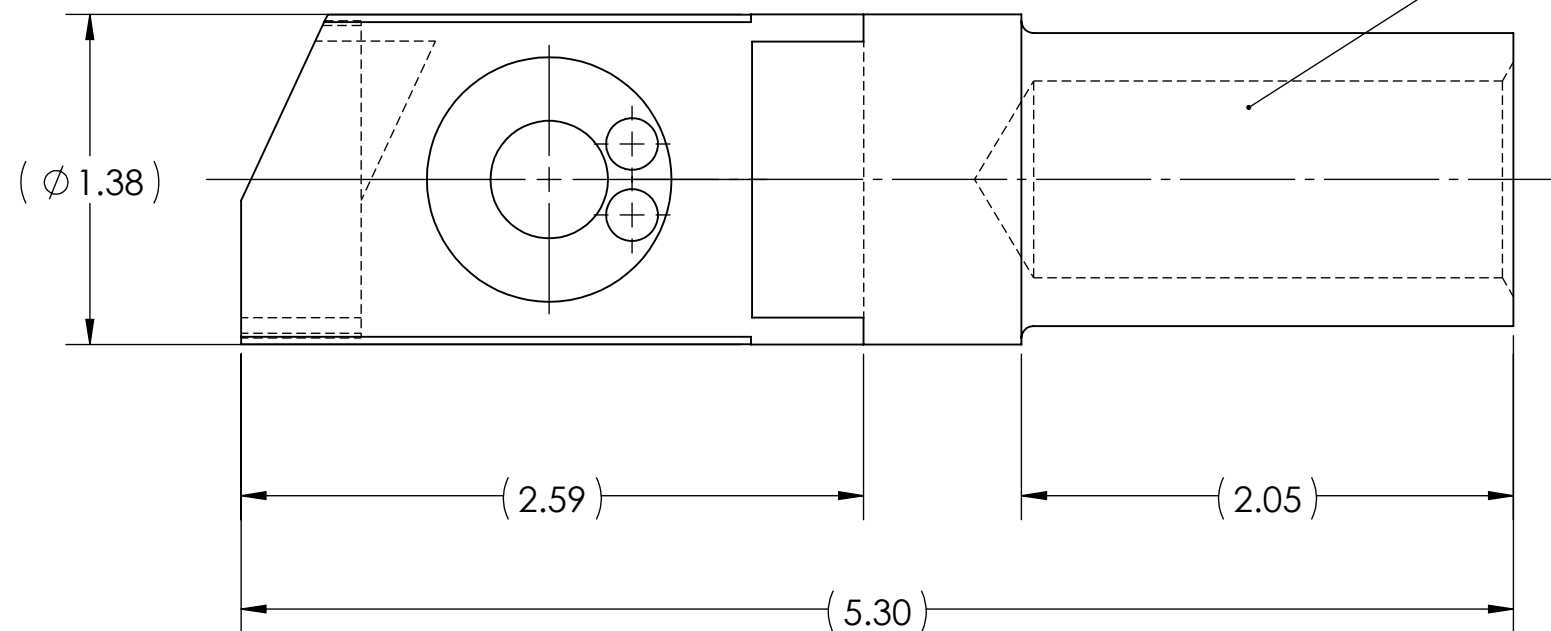

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SILVER PLATED TO WITHSTAND HIGHER OPERATING TEMPERATURES, PROVIDE GREATER CONDUCTIVITY, AND PROTECTION AGAINST CORROSION
3. STANDARD INTERFACE ALLOWS TERMINAL TO MATE WITH EXISTING DISCONNECT DESIGNS
4. WIRE STRIP LENGTH: 2-1/8"
5. MANUFACTURED FROM HIGH STRENGTH BRASS ALLOY
6. APPROXIMATE WEIGHT: 1.200 LBS

4	12199	8/9/2022
3	11978	10/15/2021
2	T-400HS T-300HS	10/27/2016
1	0V00	7/12/2016
NO.	ECN	DATE
REVISIONS		

				X		BRASS ALLOY												
QTY.				PT.	NAME OR DESCRIPTION													
					CRIMPABLE GLAD HAND for 535 (1325/24) DLO CABLE													
					REF. DWG'S: 2Z06-55924 H:\2Z06\GHD-535													
GHD-535-1 CAT.NO.					 PennUnion™ 229 WATERFORD STREET EDINBORO, PA 16412 USA					DRAWN BY: CLT			DATE: 8/2/2023			CHK'D: MES		
										SCALE: 5:4		INTERPRET PER ASME Y14.5-2009				FILE: 2Z06		
					SIZE: B			DWG. NO.	4	GHD-535					REV.			