
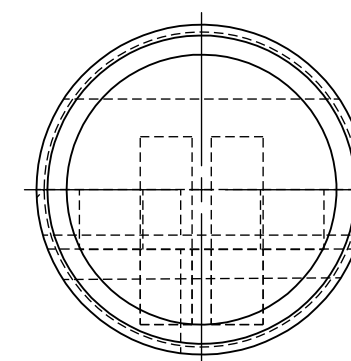
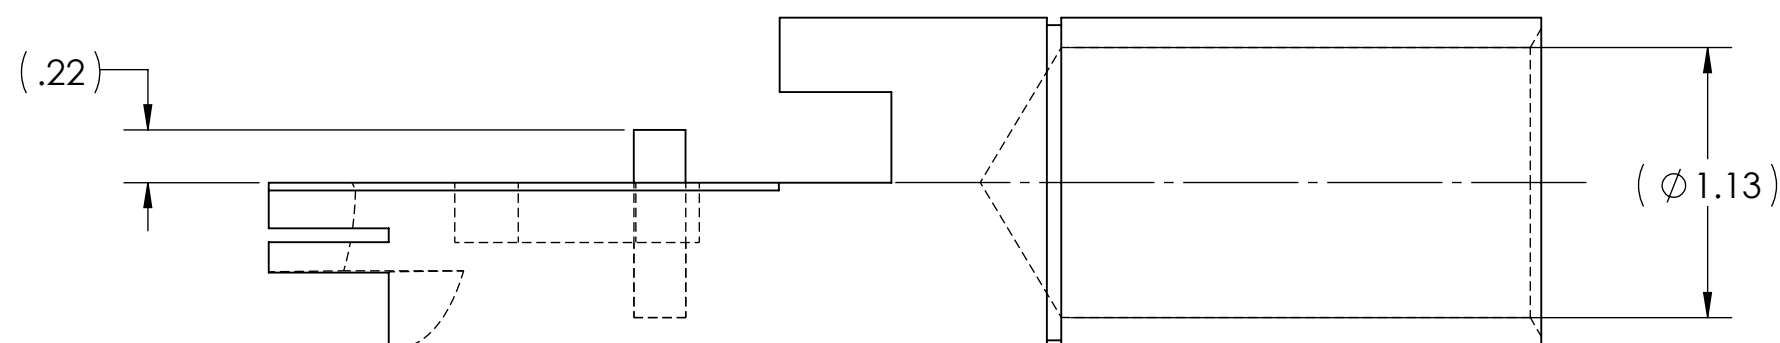
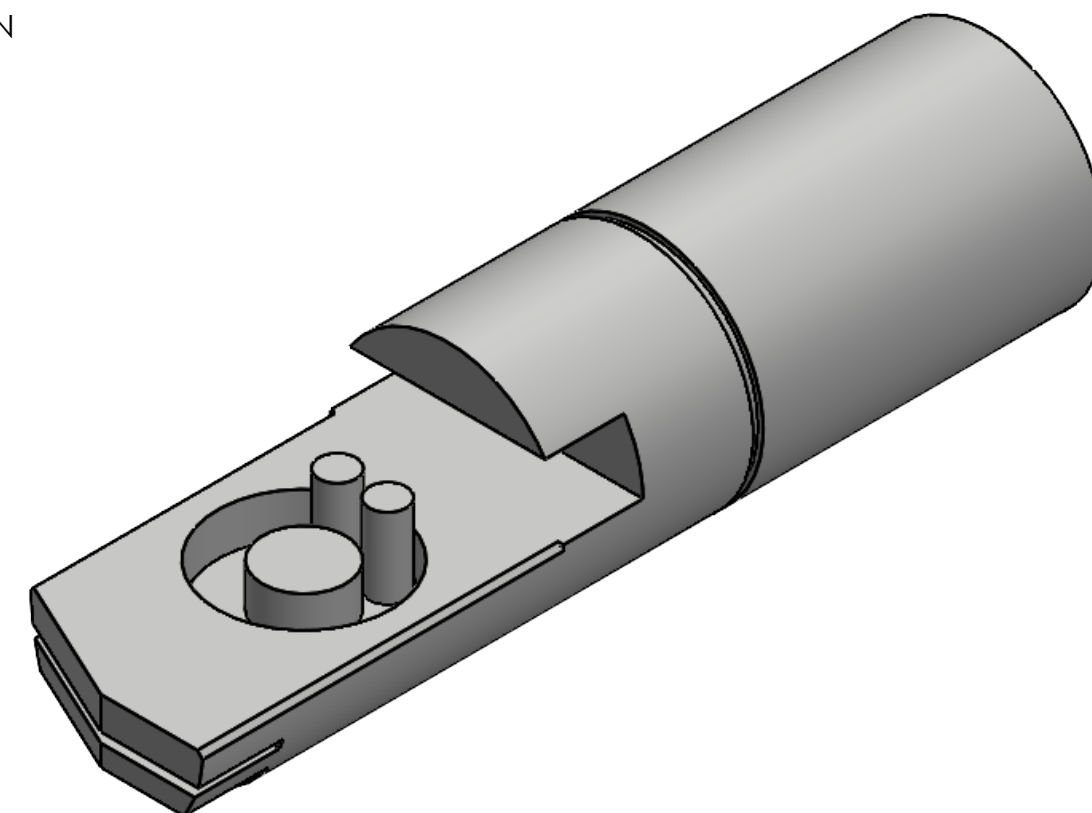


METAL STAMP TO READ:

1. PENN-UNION
2. GHD-646-1
3. 646
4. 1600/24
5. T-400H

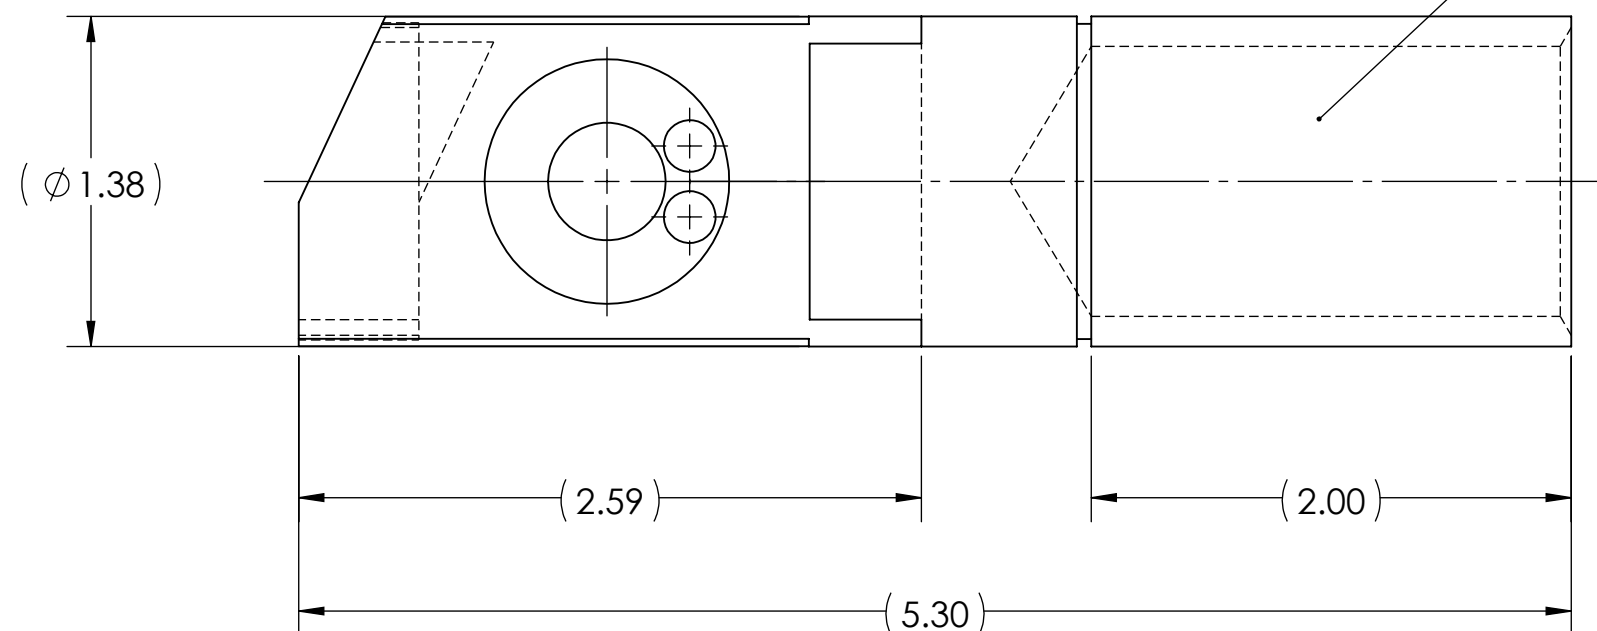

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. SILVER PLATED TO WITHSTAND HIGHER OPERATING TEMPERATURES, PROVIDE GREATER CONDUCTIVITY, AND PROTECTION AGAINST CORROSION
3. STANDARD INTERFACE ALLOWS TERMINAL TO MATE WITH EXISTING DISCONNECT DESIGNS
4. WIRE STRIP LENGTH: 2-1/8"
5. MANUFACTURED FROM HIGH STRENGTH BRASS ALLOY
6. APPROXIMATE WEIGHT: LBS

2	12199	8/9/2022
1	11978	10/15/2021
NO.	ECN	DATE
REVISIONS		

			X	BRASS ALLOY
QTY.		PT.		NAME OR DESCRIPTION
				CRIMPABLE GLAD HAND for 646 (1600/24) DLO CABLE
				REF. DWG'S: 2Z06-55925 H:\2Z06\GHD-646
				DRAWN BY: CLT DATE: 8/2/2023 CHK'D: MES
				SCALE: 5:4 INTERPRET PER ASME Y14.5-2009 FILE: 2Z06
				SIZE: B DWG. NO. GHD-646 REV 2
				PENNY UNION 229 WATERFORD STREET EDINBORO, PA 16412 USA