



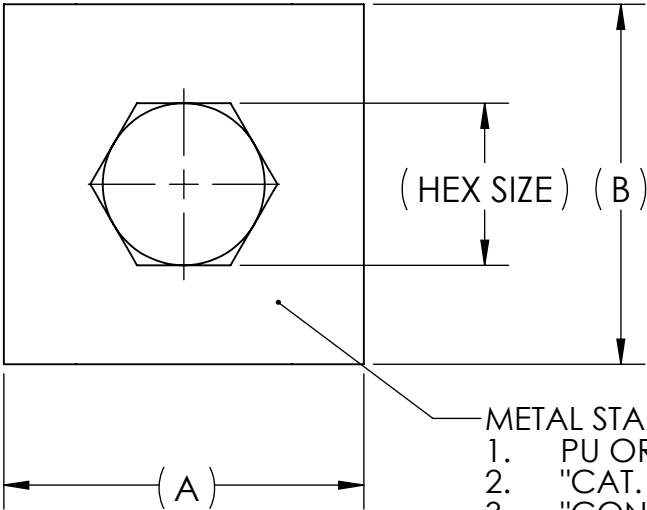


METAL STAMP TO READ:
1. PU OR PUC
2. "CAT. NO"
3. "CONDUCTOR RANGE"
GHS-1, GHS-2, GHS-3 ONLY

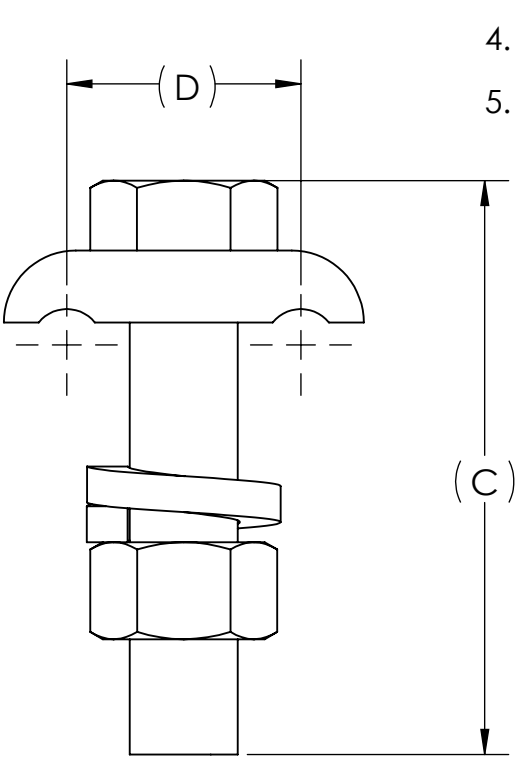

REV.	CAT. NO.	CONDUCTOR RANGE	DIMENSIONS				BOLT SIZE	HEX SIZE	INSTALLATION TORQUE (IN•LB) (SEE NOTE 3)	APPROX. WEIGHT (LB)
			A	B	C	D				
02	GHS-1	8 SOL. - 4 STR.	1.25	1.25	1.99	.81	3/8	9/16	-	0.208
04	GHS-2	4 SOL. - 2/0 STR.	1.56	1.50	1.99	1.00	3/8	9/16	-	0.305
03	GHS-3	2/0 SOL. - 250 MCM	1.94	1.63	2.06	1.25	1/2	3/4	450	0.525
02	GHS-4*	300 - 500 MCM	2.63	1.94	2.47	1.50	1/2	3/4	-	0.900
-	GHS-5*	500 - 750 MCM	3.25	2.38	3.17	1.88	5/8	15/16	-	1.566
-	GHS-6*	750 - 1000 MCM	3.50	2.50	3.17	2.00	5/8	15/16	-	1.797
-	GHS-7*	1000 - 1250 MCM	4.00	2.75	3.67	2.25	5/8	15/16	-	2.475

*NOT cULus LISTED

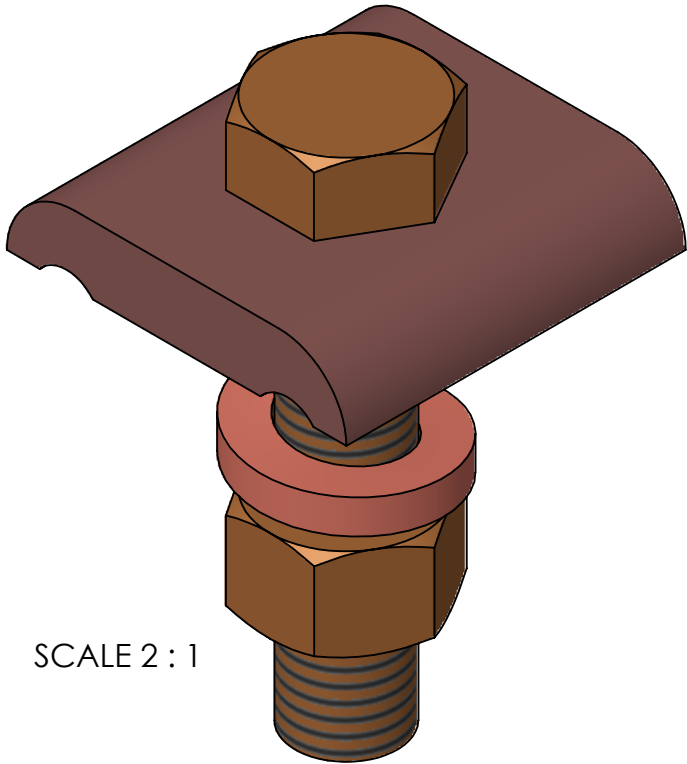

SCALE 2 : 1

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - CLAMP IS MANUFACTURED FROM HIGH COPPER CONTENT ALLOY
 - UNASSIGNED TORQUE VALUES PER UL486A-B FOR MECHANICAL CONNECTORS
 - DESIGNED TO CLAMP TWO COPPER CONDUCTORS TO A FLAT SURFACE OR 1/4 THICK BUS BAR
 - STANDARD CATALOG ITEMS ACCOMMODATE 1/4 BAR; FOR OTHER APPLICATIONS, SPECIFY BAR THICKNESS
 - CONNECTIONS ARE cULus LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL 467

			1	4	SILICON BRONZE LOCK WASHER
			1	3	SILICON BRONZE HEX NUT
			1	2	SILICON BRONZE BOLT
			1	1	BRONZE CLAMP BODY
QTY.		PT.	NAME OR DESCRIPTION		
			BRONZE GROUND CLAMP		
			for		
			COPPER CONDUCTORS		
			REF. DWG'S: 1N57-26148, 24960, 25764, 25609, 27924		
			H:\1N57\GHS SERIES		
			DRAWN BY: DT DATE: 9/11/2023 CHK'D: MES		
			SCALE: 3:2 INTERPRET PER ASME Y14.5-2009 FILE: 1N57		
			SIZE: B		
			DWG. NO. GHS SERIES		
			REV. -		