
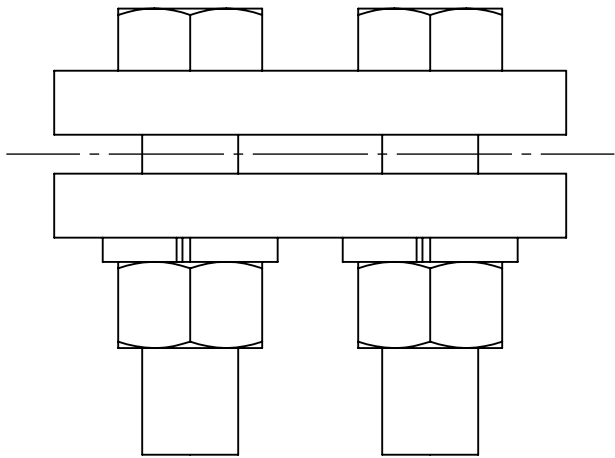
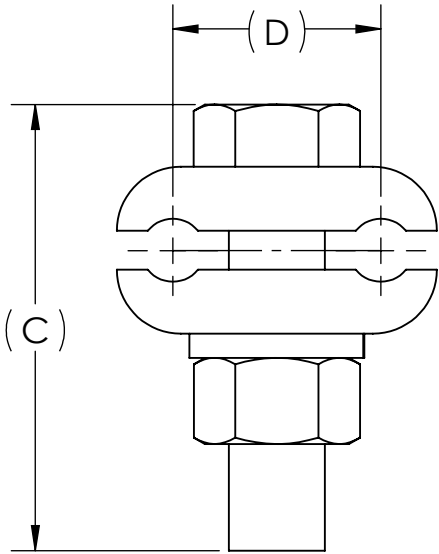



METAL STAMP TO READ:
1. PU OR PUC
2. "CAT. NO."
3. "CONDUCTOR RANGE"
GJ-1, GJ-2, GJ-3 ONLY

4. 
5. DB

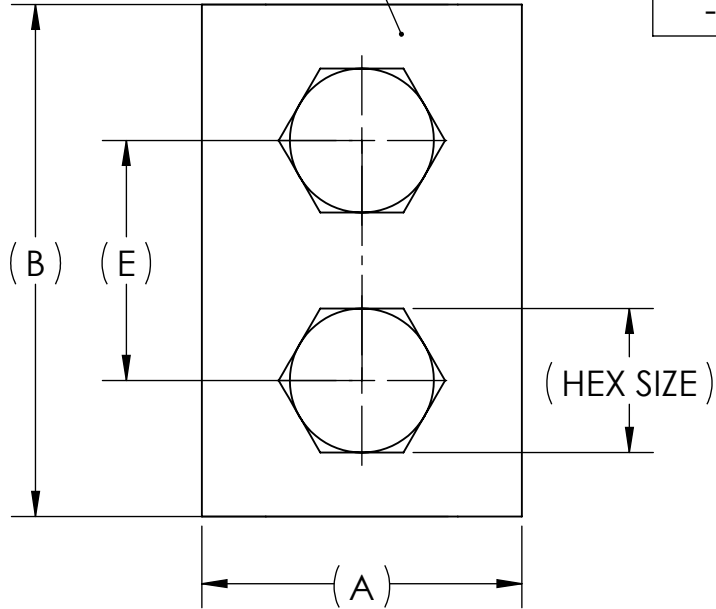

REV.	CAT. NO.	CONDUCTOR RANGE	DIMENSIONS					BOLT SIZE	HEX SIZE	INSTALLATION TORQUE (IN•LB)	APPROX WEIGHT (LB)
			A	B	C	D	E				
01	GJ-1	8 SOL. - 4 STR.	1.25	2.00	1.74	.81	.94	3/8	9/16	-	0.490
02	GJ-2	4 SOL. - 2/0 STR.	1.56	1.88	1.99	1.00	1.00	3/8	9/16	-	0.647
04	GJ-3	2/0 SOL. - 250 MCM	1.99	2.44	2.22	1.25	1.31	1/2	3/4	480	1.419
03	GJ-4 *	300 - 500 MCM	2.50	2.50	2.47	1.50	1.38	1/2	3/4	-	1.753
02	GJ-5 *	500 - 750 MCM	3.26	3.06	3.17	1.88	1.56	5/8	15/16	-	3.797
02	GJ-6 *	750 - 1000 MCM	3.26	3.06	3.17	1.88	1.56	5/8	15/16	-	3.797
-	GJ-7 *	1000-1200 MCM	4.00	3.50	3.00	2.25	1.75	5/8	15/16	-	-

*NOT cULus LISTED

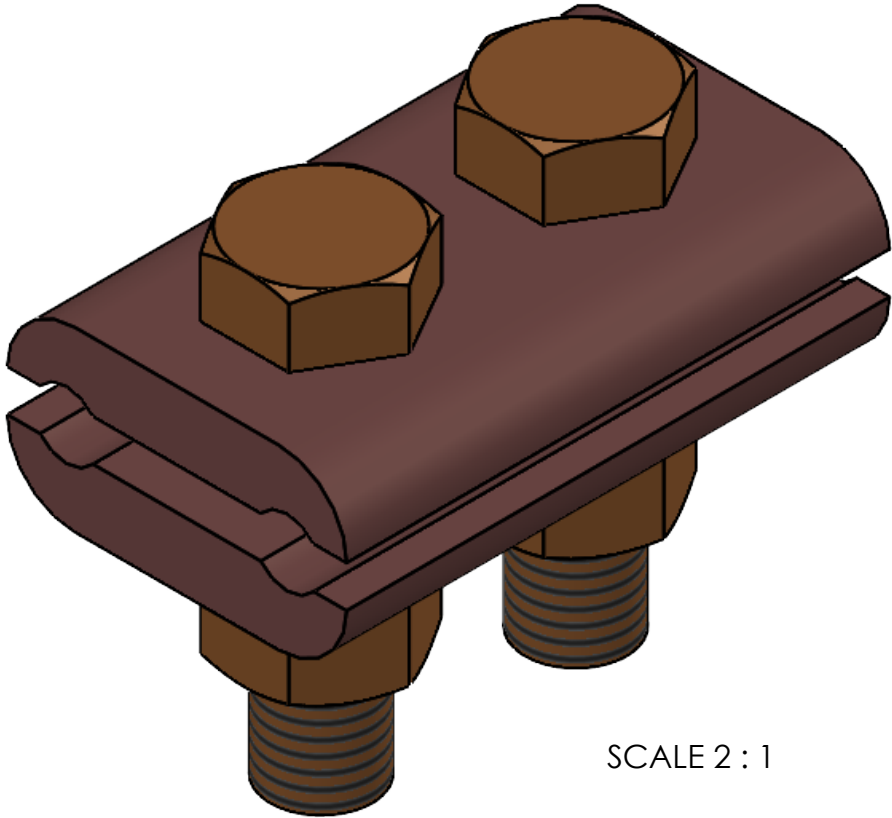

SCALE 2 : 1

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - CLAMP IS MANUFACTURED FROM HIGH COPPER CONTENT ALLOY
 - UNASSIGNED TORQUE VALUES PER UL486A-B FOR MECHANICAL CONNECTORS
 - DESIGNED TO CLAMP TWO COPPER CONDUCTORS TO A FLAT SURFACE OR 1/4 THICK BUS BAR
 - STANDARD CATALOG ITEMS ACCOMMODATE 1/4 BAR; FOR OTHER APPLICATIONS, SPECIFY BAR THICKNESS
 - CONNECTIONS ARE cULus LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL 467

			2	4	SILICON BRONZE LOCK WASHER
			2	3	SILICON BRONZE HEX NUT
			2	2	SILICON BRONZE BOLT
			2	1	BRONZE CLAMP BODY
QTY.		PT.	NAME OR DESCRIPTION		
			BRONZE GROUND CLAMP		
			for		
			COPPER CONDUCTORS		
			REF. DWG'S: 1N59-17502, 07869, 08384, 09388, 16963, 19694		
			H:\1N59\GJ SERIES		
			DRAWN BY: DT		
			DATE: 11/6/2023		
			CHK'D: MES		
			SCALE: 4:3		
			INTERPRET PER ASME Y14.5-2009		
			FILE: 1N59		
			SIZE: B		
			DWG. NO.		
			GJ SERIES		
			REV.		
			-		