
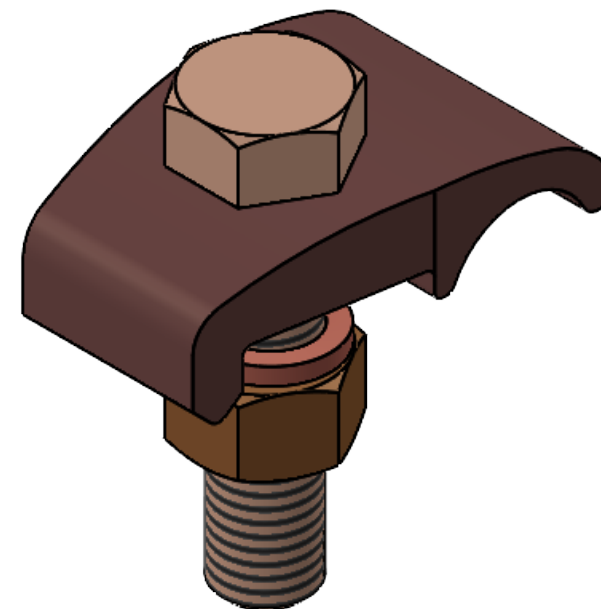
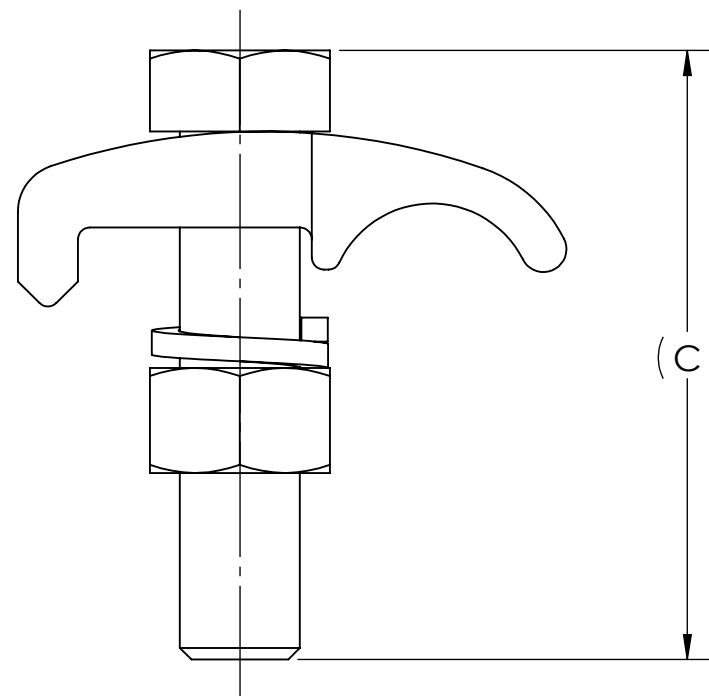


METAL STAMP TO READ:—

1. "CAT. NO."
2. "CONDUCTOR RANGE"
3. DB
4.  **cULus**

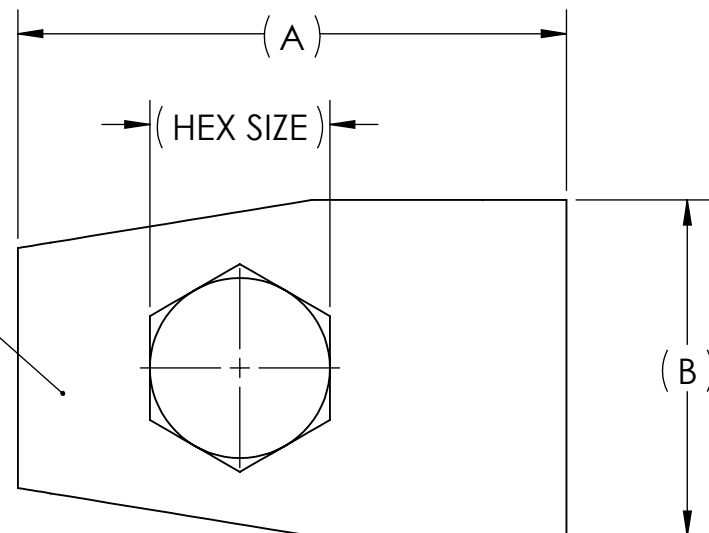

CONDUCTOR RANGE	INSTALLATION TORQUE (IN•LB)
8 AWG	75
6 - 4 AWG	110
3 - 1AWG	150
1/0 - 2/0 AWG	180
3/0 - 4/0 AWG	250
250 - 400 kcmil	325
500 - 750 kcmil	375
800 - 1000 kcmil	500

- NOTES:
1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 2. CLAMP IS MANUFACTURED FROM HIGH COPPER CONTENT ALLOY
 3. DESIGNED TO CLAMP COPPER CONDUCTOR TO FLAT SURFACE OR 1/4 THICK BUS BAR
 4. STANDARD CATALOG ITEMS ACCOMMODATE 1/4 BAR; FOR OTHER APPLICATIONS, SPECIFY BAR THICKNESS
 5. CONNECTIONS ARE cULus LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL 467

			1	3	BRONZE LOCK WASHER
			1	2	BRONZE HEX NUT
			1	1	COPPER CLAMP
QTY.			PT.	NAME OR DESCRIPTION	
			SEE TABLE CAT. NO.	BRONZE GROUND CLAMP CONNECTOR for COPPER CONDUCTORS	
				REF. DWG'S: 1N51-22087, 1N51-22085, 1N51-20992, 1N51-24793, 1N51-24576 H:\1N51\GMS SERIES	
				DRAWN BY: MES DATE: 2/2/2026 CHK'D: MES	
				SCALE: 1:1 INTERPRET PER ASME Y14.5-2009 FILE: 1N51	
				SIZE: B	DWG. NO.
					REV. -
			229 WATERFORD STREET EDINBORO, PA 16412 USA		