
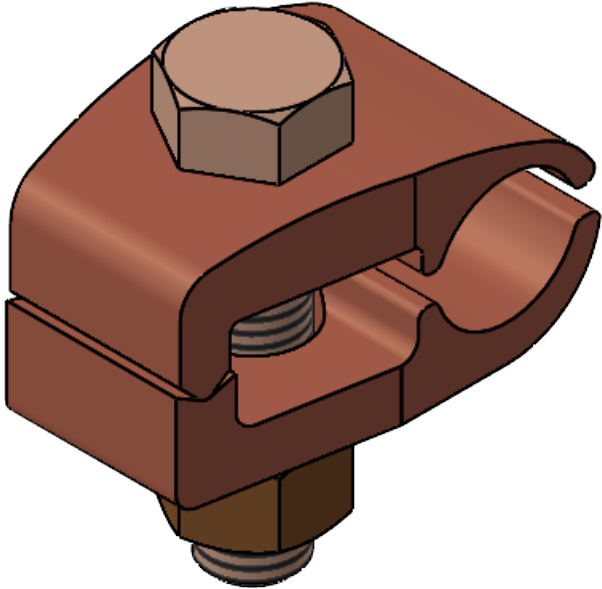
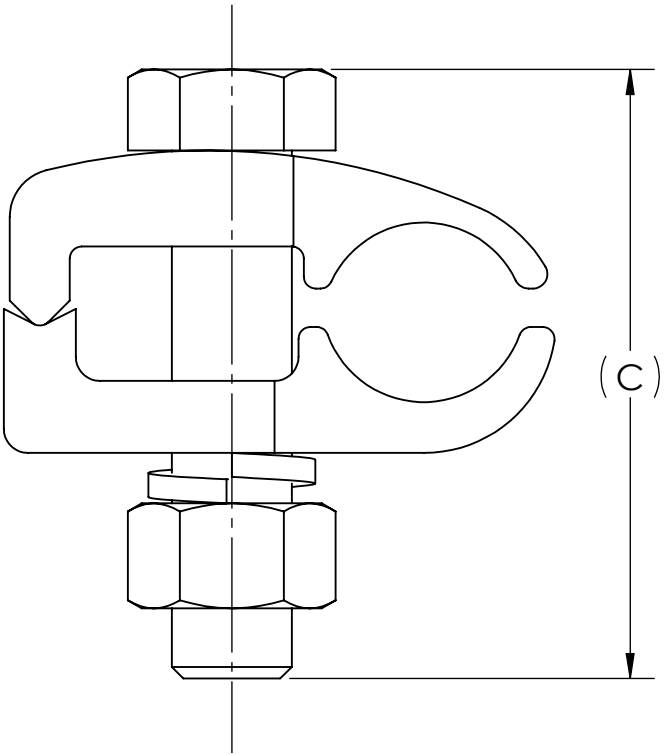


REV.	CAT. NO.	CONDUCTOR RANGE	DIMENSIONS			BOLT SIZE	HEX SIZE
			A	B	C		
09	GM-1	8 Sol. - 4 Str.	1.08	1.00	1.49	3/8	9/16
-	GM-2	4 Sol. - 2/0 Str.	1.53	1.13	1.74	3/8	9/16
-	GM-3	2/0 Sol. - 250 kcmil	1.88	1.38	2.06	1/2	3/4
05	GM-4	300 - 500 kcmil	2.33	1.50	2.47	1/2	3/4
01	GM-5	500 - 750 kcmil	2.87	1.75	3.17	5/8	15/16
03	GM-6	750 -1000 kcmil	3.56	2.00	3.67	5/8	15/16

- METAL STAMP TO READ:
- "CAT. NO."
 - "CONDUCTOR RANGE"
 - DB
 - 

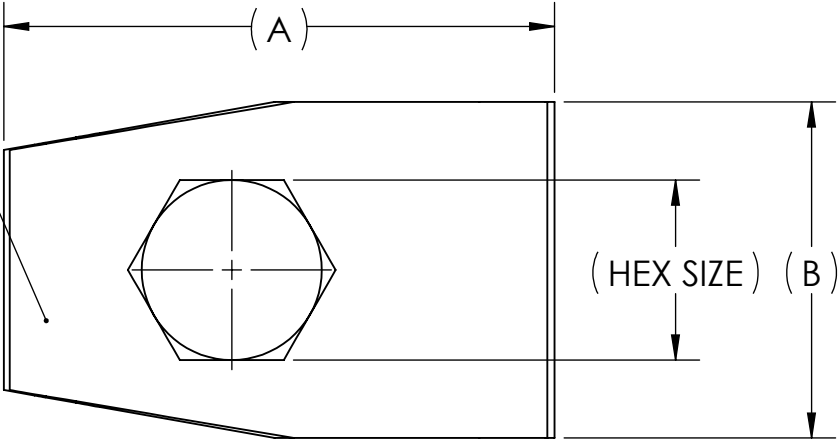

CONDUCTOR RANGE	INSTALLATION TORQUE (IN•LB)
8 AWG	75
6 - 4 AWG	110
3 - 1AWG	150
1/0 - 2/0 AWG	180
3/0 - 4/0 AWG	250
250 - 400 kcmil	325
500 - 750 kcmil	375
800 - 1000 kcmil	500

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - CLAMP IS MANUFACTURED FROM HIGH COPPER CONTENT ALLOY
 - DESIGNED TO CLAMP COPPER CONDUCTOR TO FLAT SURFACE OR 1/4 THICK BUS BAR
 - STANDARD CATALOG ITEMS ACCOMMODATE 1/4 BAR; FOR OTHER APPLICATIONS, SPECIFY BAR THICKNESS
 - CONNECTIONS ARE cULus LISTED FOR GROUNDING, BONDING, AND DIRECT BURIAL APPLICATIONS PER UL 467

			1	4	BRONZE LOCK WASHER
			1	3	BRONZE HEX NUT
			1	2	COPPER CLAMP
			1	1	COPPER BODY
QTY.			PT.	NAME OR DESCRIPTION	
				BRONZE GROUND CLAMP CONNECTOR for COPPER CONDUCTORS	
				REF. DWG'S: 1N49-08552, 5N49-97754, 5N49-97753, 1N49-07424, 1N49-09515, 1N49-17796 H:\1N49\GM SERIES	
SEE TABLE	CAT. NO.	 V2		DRAWN BY: MES DATE: 2/2/2026 CHK'D: MES	
		PennUnion™		SCALE: 1:1 INTERPRET PER ASME Y14.5-2009 FILE: 1N49	
		229 WATERFORD STREET EDINBORO, PA 16412 USA		SIZE: B	
				DWG. NO. GM SERIES	
				REV. -	