

DWG. NO.	REV.
L2A-1000-2	-

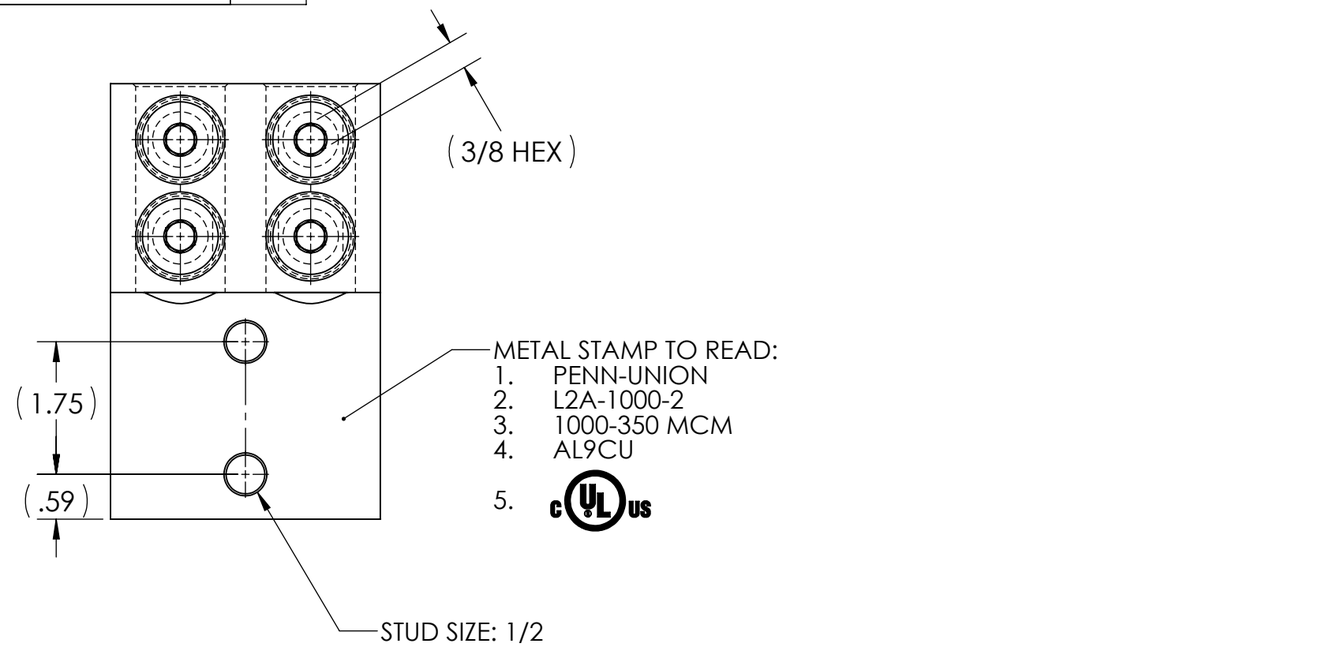

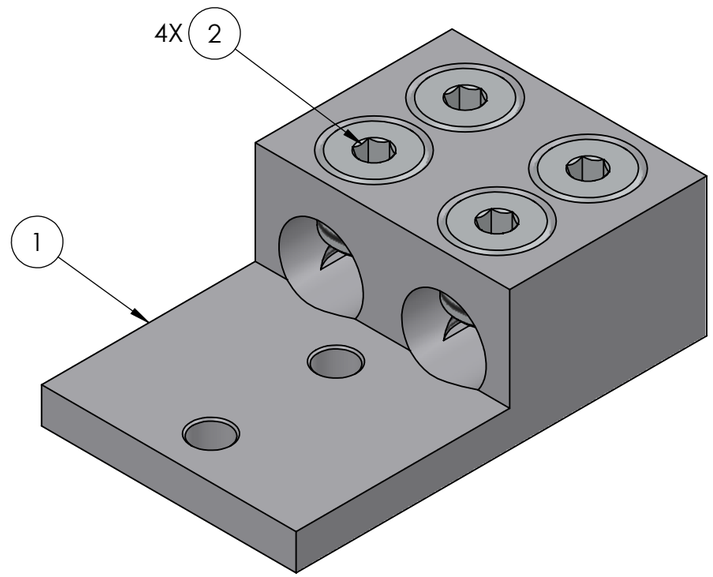

SCALE 2 : 3

NOTES:
1. MANUFACTURED FROM HIGH STRENGTH ALUMINUM ALLOY EXTRUSION
2. ELECTRO-TIN PLATED TO ENSURE MINIMUM CONTACT RESISTANCE AND CORROSION PROTECTION
3. CONNECTORS ARE RATED FOR 600V, 90°C APPLICATIONS
4. THE USE OF OXIDE INHIBITOR IS RECOMMENDED FOR ALL ALUMINUM TERMINATIONS
5. cULus LISTED PER UL486A-B FOR ALUMINUM AND COPPER CONDUCTORS AT 90°C
6. INSTALLATION TORQUE: 500 IN•LB, STRIP LENGTH: 1.75
7. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
8. APPROX. WEIGHT: 1.920

RoHS COMPLIANT

NO.	ECN	DATE
REVISIONS		

QTY.	PT.	NAME OR DESCRIPTION
4	2	SET SCREW, ALUMINUM, TIN PLATED
1	1	LUG BODY, ALUMINUM, TIN PLATED

ALUMINUM MECHANICAL LUG
for
350-1000 MCM AL9CU

REF. DWG'S: 5J15-96408 H:\5J15\L2A-1000-2

CAT. NO. L2A-1000-2

PENNUNION™
229 WATERFORD STREET
EDINBORO, PA 16412 USA

DRAWN BY: DT DATE: 9/9/2023 CHK'D: MES
SCALE: 1:2 INTERPRET PER ASME Y14.5-2009 FILE: 5J15
SIZE: B

DWG. NO.	REV.
L2A-1000-2	-

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO PENN-UNION CO. LLC. IT IS SUBMITTED IN CONFIDENCE AND IS TO BE USED SOLELY FOR THE PURPOSE FOR WHICH IT IS FURNISHED AND MUST BE RETURNED UPON REQUEST. THIS DOCUMENT AND SUCH INFORMATION IS NOT TO BE REPRODUCED, TRANSMITTED, DISCLOSED, OR USED OTHERWISE IN WHOLE OR IN PART WITHOUT THE EXPRESS CONSENT OF PENN-UNION CO. LLC.