


DWG. NO. **PSKS-12-3 1/4** REV. **16**

CATALOG NUMBER	COPPER STEM		CONDUCTOR RANGE			NO. OF CRIMPS		DIE SIZE
	CONDUCTOR SIZE (AWG)	MAX DIAMETER	ALUMINUM	ACSR	CAP COLOR	HAND	HYD.	
PSKS-12-3 1/4	2 SOL.	.258	1, 2 STR., 1/0 SOL	2 6/1, 7/1	RED	3	1	BG, 5/8



- NOTES:
1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
  2. CONNECTOR CONSTRUCTION CONSISTS OF A PURE ALUMINUM ALLOY SLEEVE AND A TIN-PLATED HIGH CONDUCTIVITY COPPER STEM
  3. DESIGNED FOR TERMINATING ALUMINUM AND ACSR CONDUCTORS AT CUT-OUTS, ARRESTORS, TRANSFORMER SECONDARIES, AND METER ENTRANCES
  4. STEM MAY BE BENT TO ANY DESIRED ANGLE FOR EASIER INSERTION
  5. CONNECTORS ARE PRE-FILLED WITH OXIDE INHIBITOR AND SEALED WITH COLOR CODED END CAPS

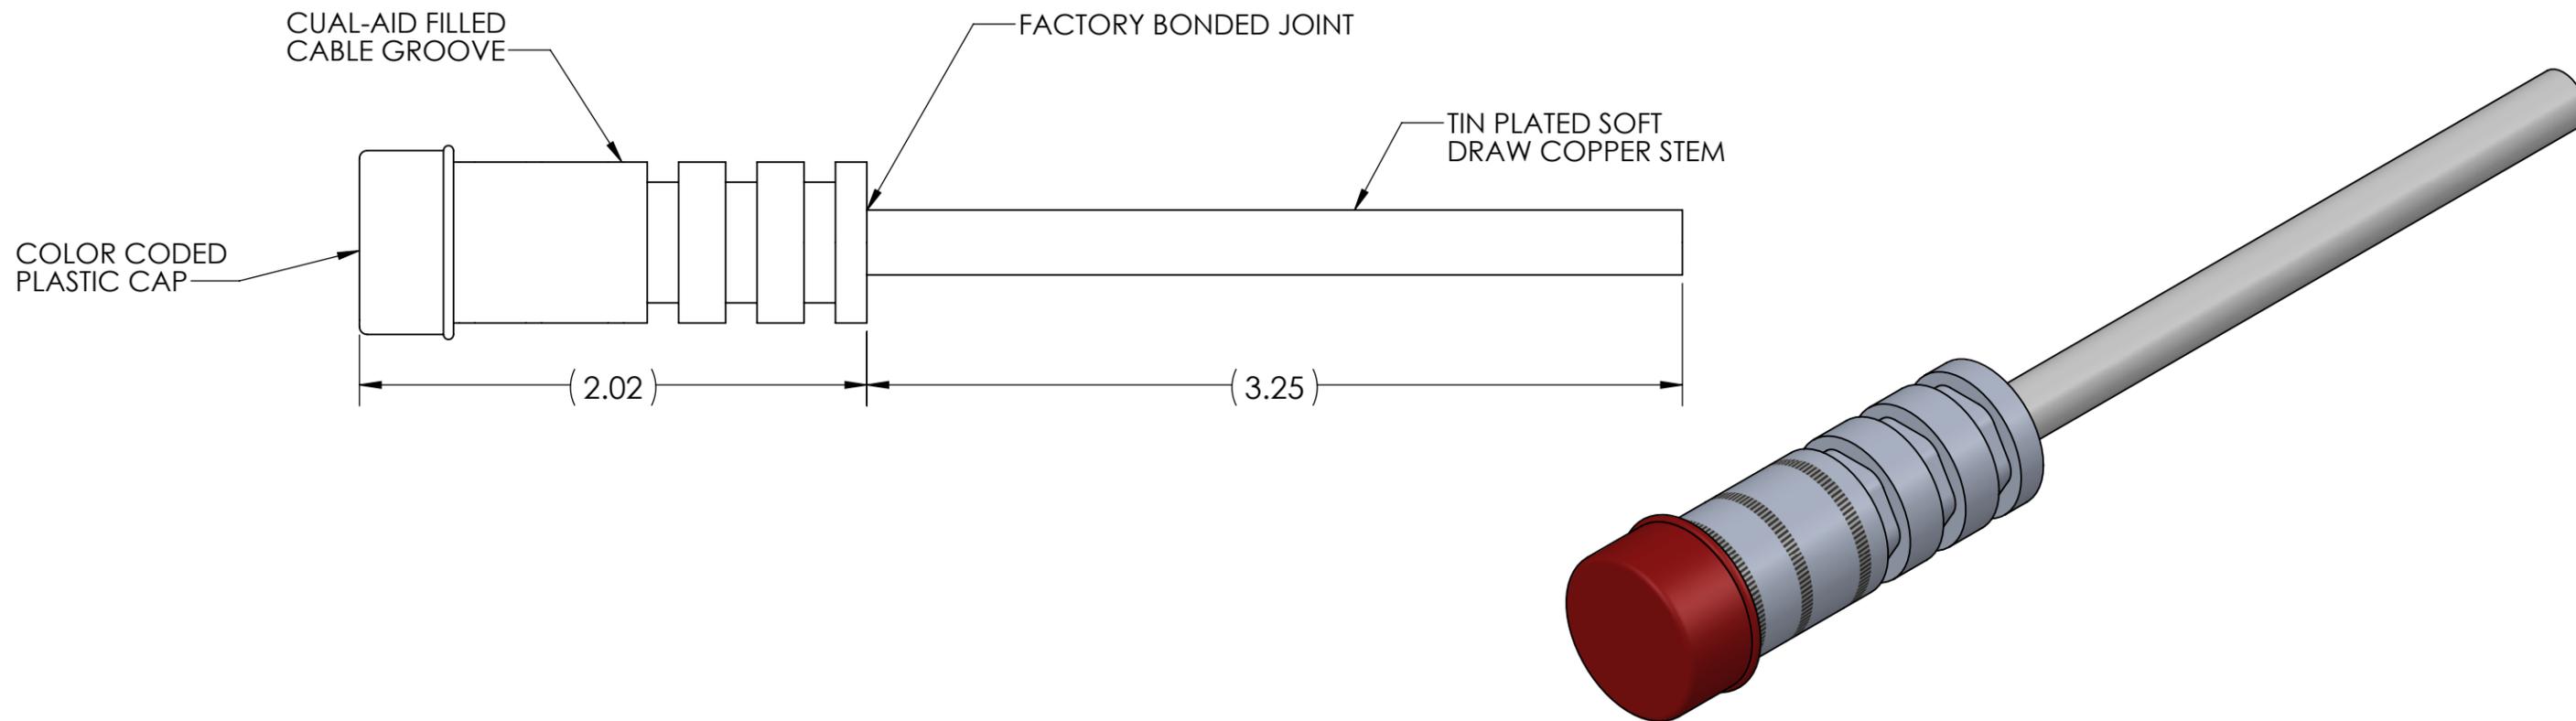

QTY.	PT.	NAME OR DESCRIPTION
1		SLEEVE
1		COPPER STEM
1		PLASTIC CAP
<b>PENN SLEEVE</b> for <b>TYPE PSKS</b>		
REF. DWG'S: 4B34-37747		H:\4B34\PSKS-12-3 1/4
DRAWN BY: DT		DATE: 4/4/2024
SCALE: 3:2		INTERPRET PER ASME Y14.5-2009
SIZE: B		FILE: 4B34
DWG. NO. <b>PSKS-12-3 1/4</b>		REV. <b>16</b>

NO.	ECN	DATE
15	-	8/1/2005
14	-	6/17/1997
13	9558	4/7/1993
12	9270	11/15/1990
11	8951-A	3/8/1988
10	8357	6/8/1984
9	8173-A	3/28/1980
REVISIONS		

SEE TABLE  
CAT. NO.

