
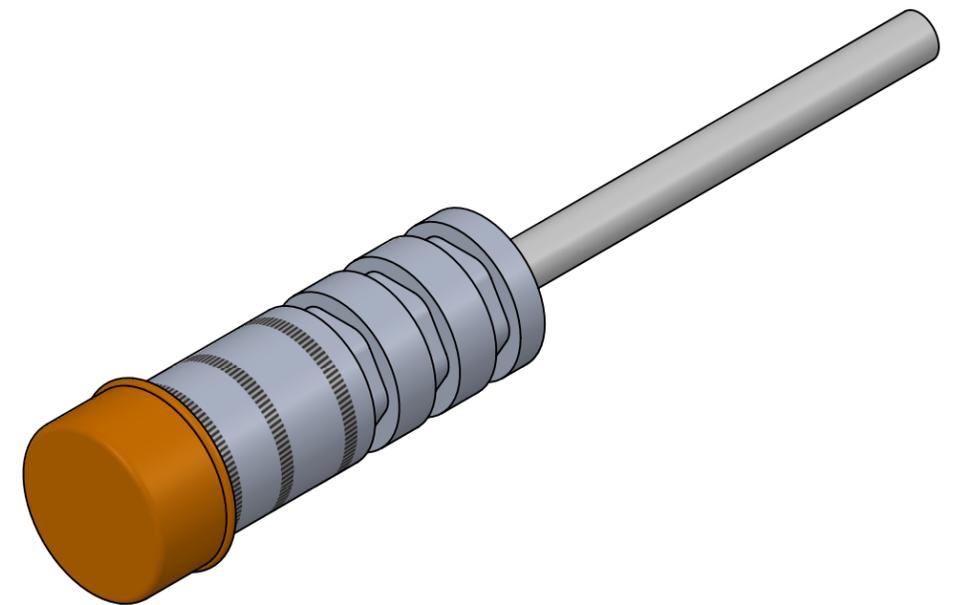


DWG. NO. **PSKS-24-2 1/4** REV. **16**

CATALOG NUMBER	COPPER STEM		CONDUCTOR RANGE			NO. OF CRIMPS		DIE SIZE
	CONDUCTOR SIZE (AWG)	MAX DIAMETER	ALUMINUM	ACSR	CAP COLOR	HAND	HYD.	
PSKS-24-2 1/4	4 SOL	.204	4 STR., 2 SOL.	4 6/1, 7/1	ORANGE	3	1	BG, 5/8

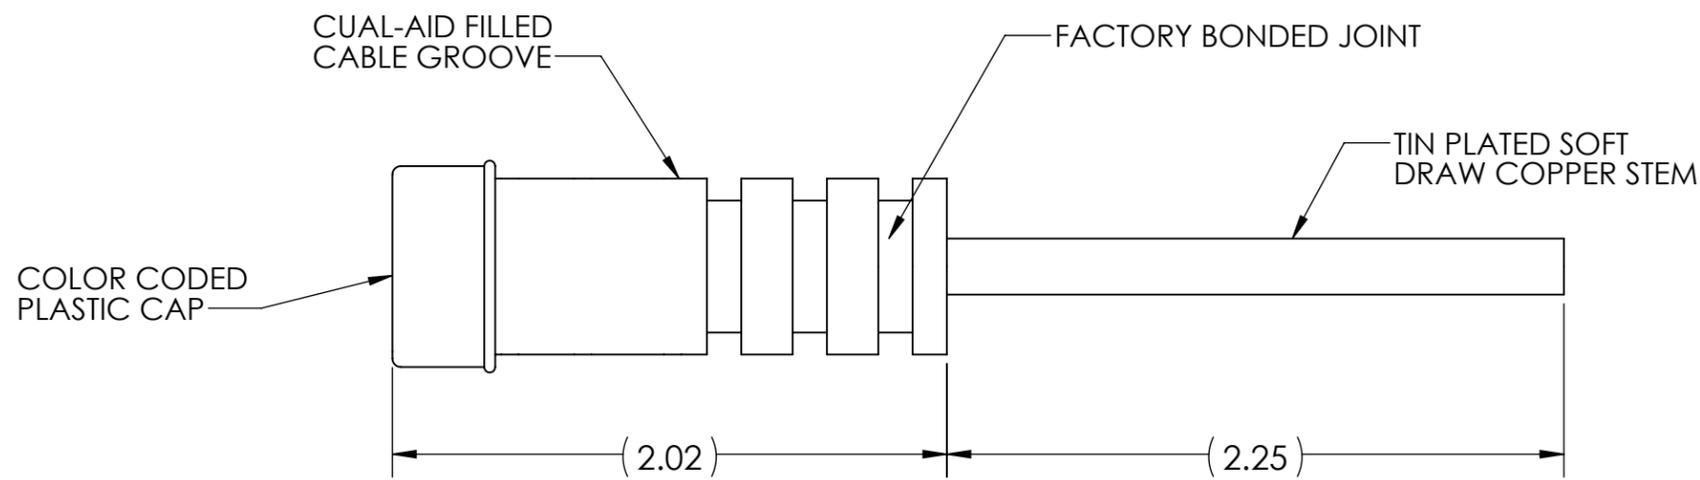

NOTES:

1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. CONNECTOR CONSTRUCTION CONSISTS OF A PURE ALUMINUM ALLOY SLEEVE AND A TIN-PLATED HIGH CONDUCTIVITY COPPER STEM
3. DESIGNED FOR TERMINATING ALUMINUM AND ACSR CONDUCTORS AT CUT-OUTS, ARRESTORS, TRANSFORMER SECONDARIES, AND METER ENTRANCES
4. STEM MAY BE BENT TO ANY DESIRED ANGLE FOR EASIER INSERTION
5. CONNECTORS ARE PRE-FILLED WITH OXIDE INHIBITOR AND SEALED WITH COLOR CODED END CAPS



NO.	ECN	DATE
16	11863	7/19/2019
15	-	8/1/2005
14	-	6/17/1997
13	9558	4/7/1993
12	9270	11/15/1990
11	8951-A	3/8/1988
10	8357	6/8/1984
9	8173-A	3/28/1980
REVISIONS		

QTY.	PT.	NAME OR DESCRIPTION
1		SLEEVE
1		COPPER STEM
1		PLASTIC CAP
PENN SLEEVE for TYPE PSKS		
REF. DWG'S: 4B34-37747		H:\4B34\PSKS-24-2 1/4
PENNUNION 229 WATERFORD STREET EDINBORO, PA 16412 USA		DRAWN BY: DT DATE: 4/4/2024 CHK'D: PJO SCALE: 3:2 INTERPRET PER ASME Y14.5-2009 FILE: 4B34
SIZE: B	DWG. NO. PSKS-24-2 1/4	REV. 16