

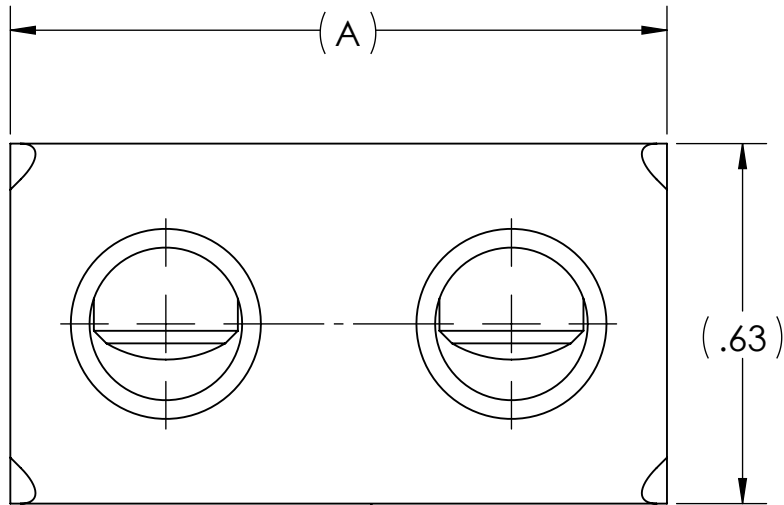
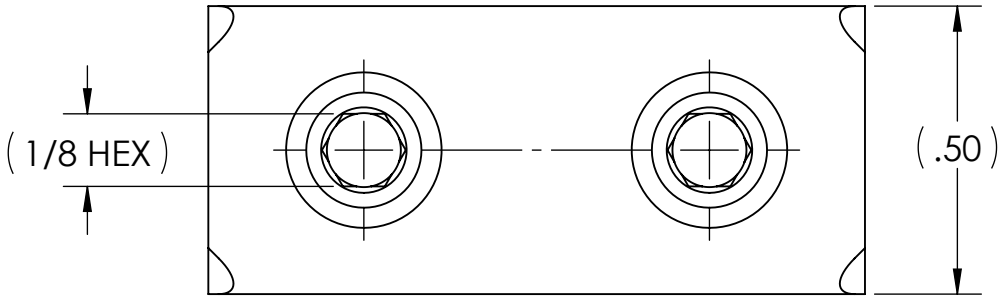


REV.	CATALOG NUMBER	SCREW QUANTITY	NUMBER OF WIRE PORTS	A	INSTALLATION TORQUE (IN•LB)	APPROX. WEIGHT (LB)
-	UPB-NA4-2	2	2	1.14	45 (10 -14 AWG) 50 (4-8 AWG)	0.035
-	UPB-NA4-3	3	3	1.74		0.053
-	UPB-NA4-4	4	4	2.34		0.072
-	UPB-NA4-5	5	5	2.94		0.090
-	UPB-NA4-6	6	6	3.54		0.109
-	UPB-NA4-8	8	8	4.74		0.145
-	UPB-NA4-10	10	10	5.94		0.182
-	UPB-NA4-12	12	12	7.14		0.219
-	UPB-NA4-14	14	14	8.34		0.256

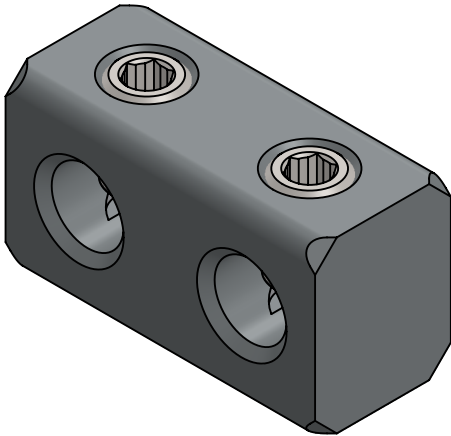

- INK STAMP TO READ:
- PENN-UNION
 - "CATALOG NUMBER"
 - 4 STR. - 14 SOL
 - AL9CU
 -

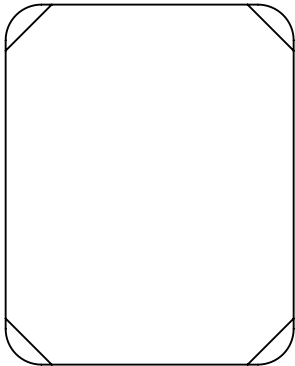

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - FIGURE IS REPRESENTATIVE EXACT COMPONENT FEATURES MAY VARY
 - TIN PLATED TO INHIBIT CORROSION
 - CONNECTORS ARE cULus LISTED PER UL486A-B FOR POWER APPLICATIONS UP TO 90°C

			X	ALUMINUM SET SCREW	
			1	ALUMINUM POWER BAR BODY	
QTY.			PT.	NAME OR DESCRIPTION	
				UNINSULATED POWER BARS FOR 4 STR. - 14 SOL.	
				REF. DWG'S: 4307-56516	
				H:\4307\UPB-NA4	
SEE TABLE			CAT. NO.		
				DRAWN BY: DT DATE: 8/19/2024 CHK'D: PJO	
				SCALE: 3:1 INTERPRET PER ASME Y14.5-2009 FILE: 4307	
				SIZE: B	
				DWG. NO.	UPB-NA4
					REV. -