




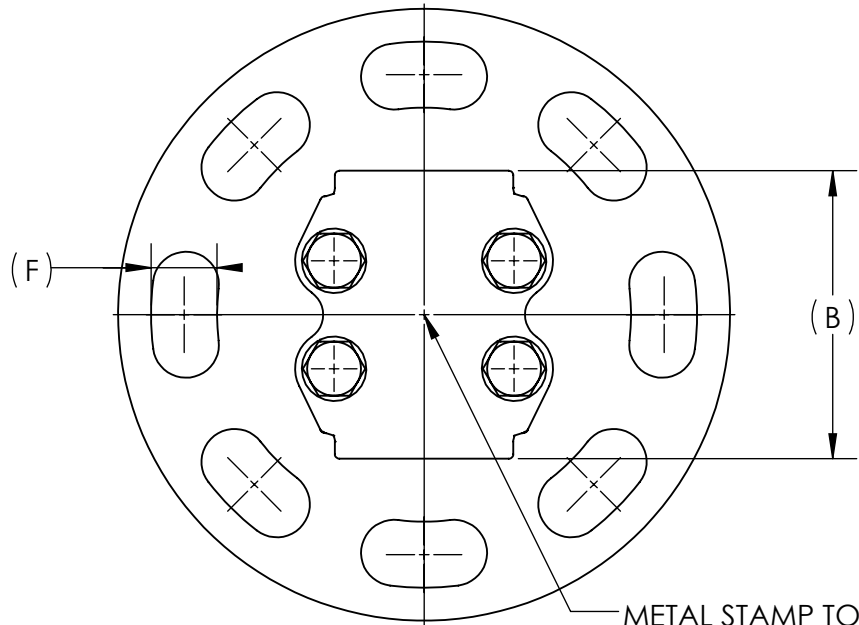

METAL STAMP TO READ:
1. "IPS SIZE"
2. "CONDUCTOR RANGE"

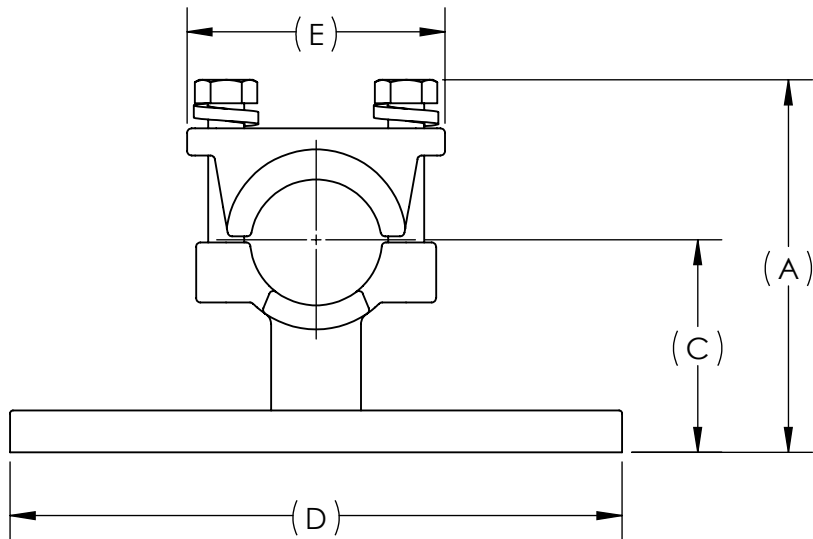

REV.	CATALOG NUMBER	IPS SIZE	COPPER CONDUCTOR RANGE	BOLT CIRCLE DIA.	DIMENSIONS						BOLT SIZE	INSTALLATION TORQUE (IN•LB)
					A	B	C	D	E	F		
3	BSR-1	1/8 -1/2	6 Str. - 500 kcmil	3.00	3.56	2.75	2.00	4.25	2.25	0.56	3/8	240
-	BSR-2			5.00	3.62	2.75	2.06	6.38	2.25	0.69		
-	BSR-5	1/4 - 1	4 Str. - 1250 kcmil	3.00	3.88	3.00	2.13	4.25	2.69	0.56		
1	BSR-6			5.00	3.91	3.00	2.19	6.38	2.69	0.69	1/2	480
-	BSR-9	3/4 - 1 1/2	850 - 2500 kcmil	3.00	4.29	3.88	2.44	4.25	1.84	0.56		
-	BSR-10			5.00	4.25	3.69	2.50	6.38	3.88	0.69		
-	BSR-11			3.00	4.29	2.88	2.56	4.25	2.03	0.56		
-	BSR-12	1 1/4 - 2	-	5.00	4.38	4.19	2.63	6.38	2.88	0.69		

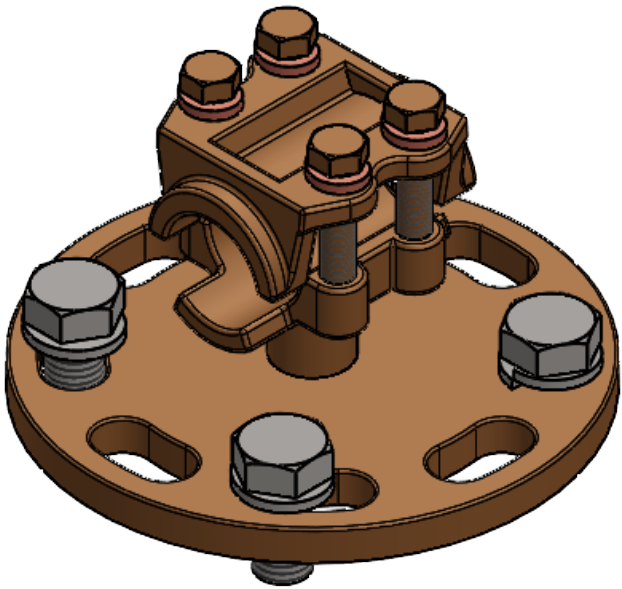

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - DESIGNED FOR MOUNTING A WIDE RANGE OF CABLE OR TUBE ON POST OR PEDESTAL TYPE INSULATOR
 - FURNISHED WITH SILICON BRONZE HARDWARE FOR CORROSION RESISTANCE
 - FOR STAINLESS STEEL BASE MOUNTING HARDWARE CONSITING OF BOLTS, NUTS, AND LOCKWASHERS, SUFFIX CATALOG NUMBER WITH "-BM"
EX. BSR-6-BM
 - FOR TIN PLATED BODY COMPONENTS, SUFFIX CATALOG NUMBER WITH "-TN"
EX. BSR-6-TN
 - FIGURE IS REPRESENTATIVE, EXACT COMPONENT FEATURES MAY VARY
 - STAINLESS STEEL MOUNTING HARDWARE ONLY SHOWN IN ISOMETRIC VIEW FOR CLARITY

			4	7	STAINLESS STEEL LOCK WASHER FOR CAP
			4	6	SILICON BRONZE LOCK WASHER FOR CAP
			4	5	STAINLESS STEEL HEX HEAD BOLT FOR CAP
			4	4	SILICON BRONZE HEX HEAD BOLT FOR CAP
			1	3	BRONZE CAP
			1	2	BRONZE SUPPORT BASE
			1	1	BRONZE SUPPORT BODY
QTY.			PT.	NAME OR DESCRIPTION	
				BRONZE SUPPORT BUS CLAMPS	
				for	
				COPPER TUBE OR CABLE	
				REF. DWG'S: 1R49-26225	
				H:\1R49\BSR SERIES	
				DRAWN BY: SUM DATE: 11/20/2023 CHK'D: MES	
				SCALE: 1:2 INTERPRET PER ASME Y14.5-2009 FILE: 1R49	
				SIZE: B	
				DWG. NO. BSR SERIES	
				REV. -	
				SEE TABLE	
				CAT. NO.	
				PENNUNION™	
				229 WATERFORD STREET	
				EDINBORO, PA 16412 USA	