

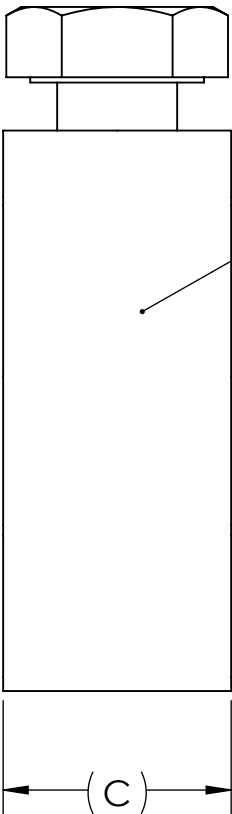


REV.	CATALOG NUMBER	ACCOMMODATES ROD SIZE	CONDUCTOR RANGE	DIMENSIONS			APPROX. WEIGHT (LBS)
				A	B	C	
10	CEB-0	3/8	10 SOL. - 2 STR.	.45	.67	.46	0.059
02	CEB-1+	1/2	8 SOL. - 2 STR.	.53	.81	.63	0.094
06	CEB-2+	5/8	8 SOL. - 2 STR.	.66	1.00	.59	0.109
-	CEB-3•	3/4	8 SOL. - 2 STR.	.82	1.08	.70	0.129

+ RUS ACCEPTED PLAIN AND TIN PLATED
• RUS ACCEPTED TIN PLATED ONLY

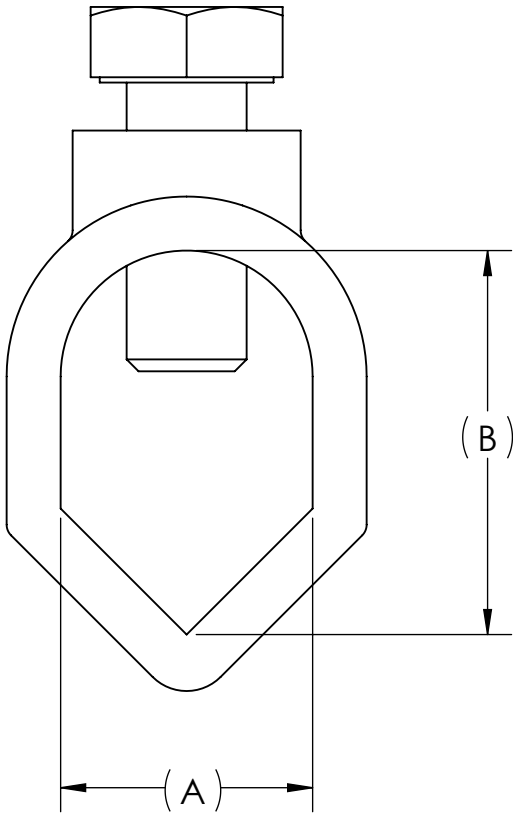

METAL STAMPING TO READ:
1. "CATALOG NUMBER"
2. "WIRE RANGE"
3. DB
4. 

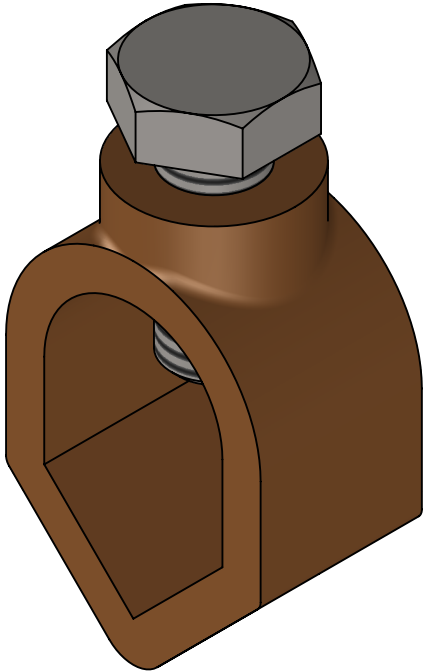

- NOTES:
- ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
 - MANUFACTURED FROM CORROSION RESISTANT CAST ALUMINUM BRONZE
 - DESIGNED TO JOIN A RANGE OF CABLE TO COPPER CLAD, GALVANIZED STEEL AND STAINLESS STEEL GROUND RODS
 - SLIPS OVER END OF ROD FOR SINGLE WRENCH INSTALLATION
 - FURNISHED WITH SILICON BRONZE HEX HEAD BOLT
 - UL LISTED FOR DIRECT BURIAL IN EARTH AND CONCRETE
 - SOCKET HEAD SCREWS CAN BE FURNISHED BY SUFFIXING CATALOG NUMBER WITH "-S"
 - FOR TIN PLATING, SUFFIX CATALOG NUMBER WITH "-TN"

			1	SILICON BRONZE HEX HEAD BOLT
			1	BRONZE BODY
QTY.		PT.	NAME OR DESCRIPTION	
			GROUND ROD CLAMP ASSEMBLY for 3/8 - 3/4" ROD	
			REF. DWG'S: 5N03-98389	
			H:\5N03\CEB_SERIES	
			DRAWN BY: DT DATE: 6/21/2024 CHK'D: PJO	
			SCALE: 2:1 INTERPRET PER ASME Y14.5-2009 FILE: 5N03	
			SIZE: B	
			DWG. NO. CEB SERIES	
			REV. -	