
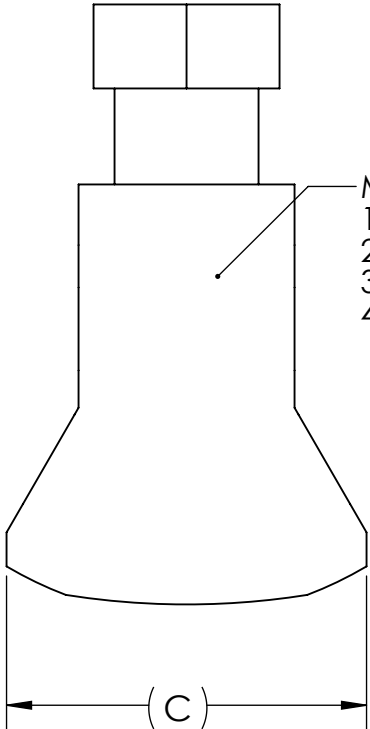


REV.	CATALOG NUMBER	ACCOMMODATES ROD SIZE (IN.)	CONDUCTOR RANGE	DIMENSIONS		
				A	B	C
07	CAB-0	3/8	14 SOL. - 6 STR.	.41	.63	.94
04	CAB-1	1/2	10 SOL. - 2 STR.	.59	.81	.88
07	CAB-2	5/8	8 SOL. - 1/0 STR.	.68	1.00	.88
03	CAB-3	3/4	8 SOL. - 1/0 STR.	.83	1.09	1.00
07	CAB-4	3/4	1/0 - 4/0 STR.	1.03	1.69	1.69
07	CAB-5	1	8 SOL. - 1/0 STR.	1.03	1.56	1.69
04	CAB-6	1	8 SOL. - 4/0 STR	1.00	1.50	1.06


METAL STAMPING TO READ:

1. DB
2. us

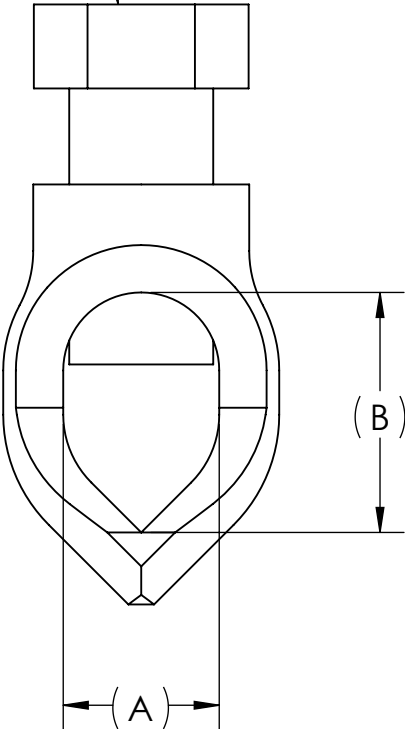

METAL STAMPING TO READ:

1. PU
2. "CATALOG NUMBER"
3. "ROD SIZE"
4. "CONDUCTOR RANGE"

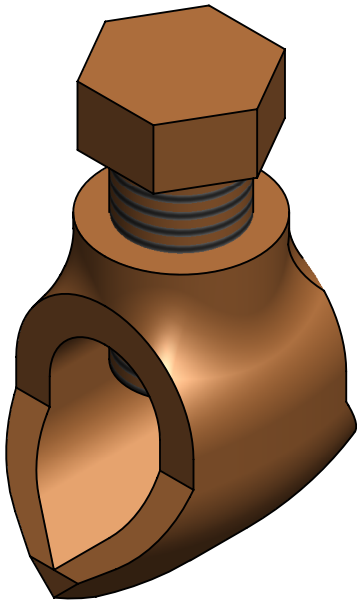

- NOTES:
1. ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
2. MANUFACTURED FROM CORROSION RESISTANT CAST ALUMINUM BRONZE
3. DESIGNED TO JOIN A RANGE OF CABLE TO COPPER CLAD, GALVANIZED STEEL AND STAINLESS STEEL GROUND RODS
4. SLIPS OVER END OF ROD FOR SINGLE WRENCH INSTALLATION
5. FURNISHED WITH SILICON BRONZE HEX HEAD BOLT
6. UL LISTED FOR DIRECT BURIAL IN EARTH AND CONCRETE
7. SOCKET HEAD SCREWS CAN BE FURNISHED BY SUFFIXING CATALOG NUMBER WITH "-S"
8. FOR TIN PLATING, SUFFIX CATALOG NUMBER WITH "-TN"

			1	SET SCREW
			1	BODY
QTY.			PT.	NAME OR DESCRIPTION
				BRONZE GROUND ROD CLAMPS for CABLE TO GROUND RODS
SEE TABLE	CAT. NO.	REF. DWG'S: 1N03-33435		
		H:\1N03\CAB SERIES		
		DRAWN BY: DT DATE: 6/17/2024 CHK'D: PJ0		
		SCALE: 2:1 INTERPRET PER ASME Y14.5-2009		FILE: 1N03
		SIZE: B	DWG. NO.	CAB SERIES
				
PennUnion™				
229 WATERFORD STREET EDINBORO, PA 16412 USA				